

Datasheet for #sb1853 UP

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with longer pulses, higher repetition rate, higher voltage or higher current than specified in this document may cause damage. It will result in loss of warranty, unless agreed upon with Alpes Lasers!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative bias on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive bias on the base contact (= submount, corresponding to the label "base" on the LLH).

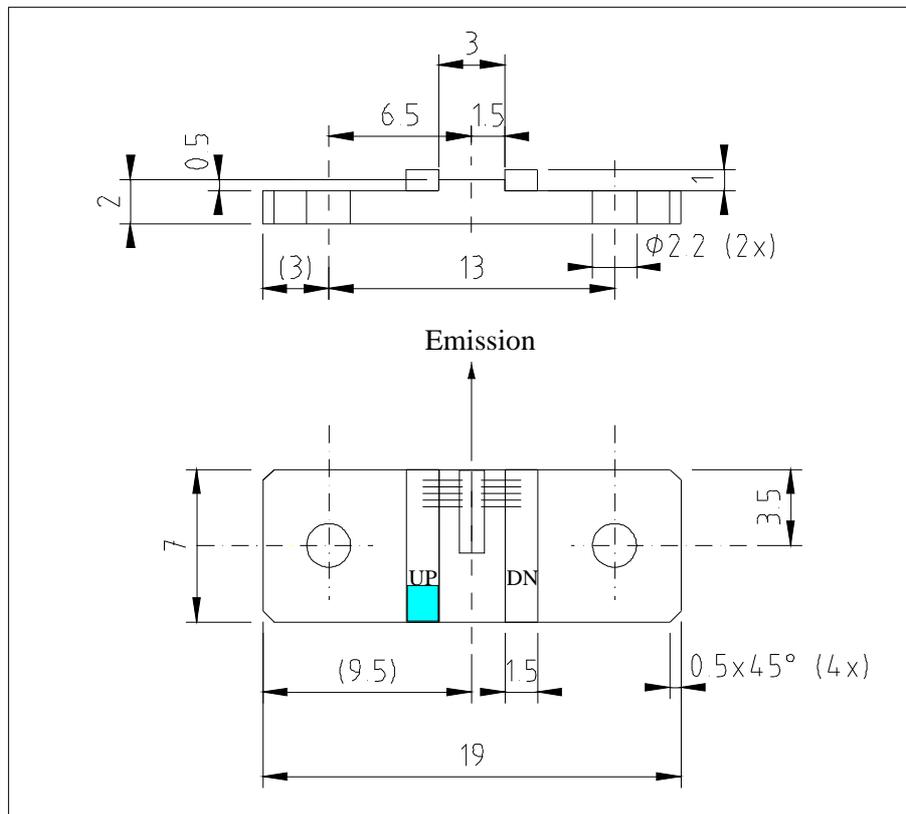


Figure 1: Mechanical and electrical interface for #sb1853 UP (please note that the laser is connected to the UP pad drawn in blue)

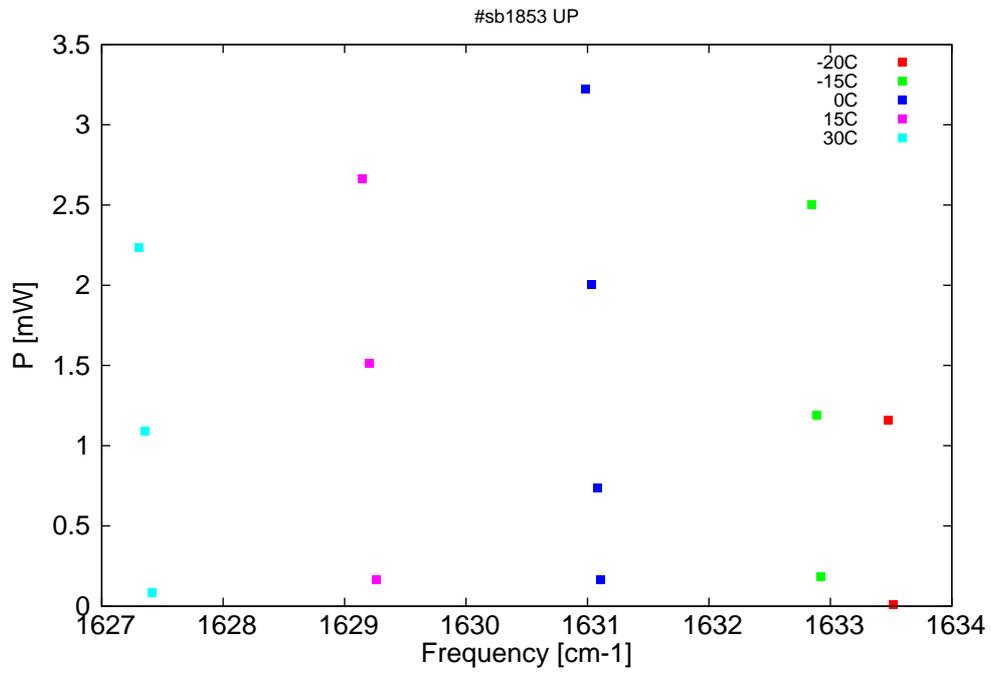


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

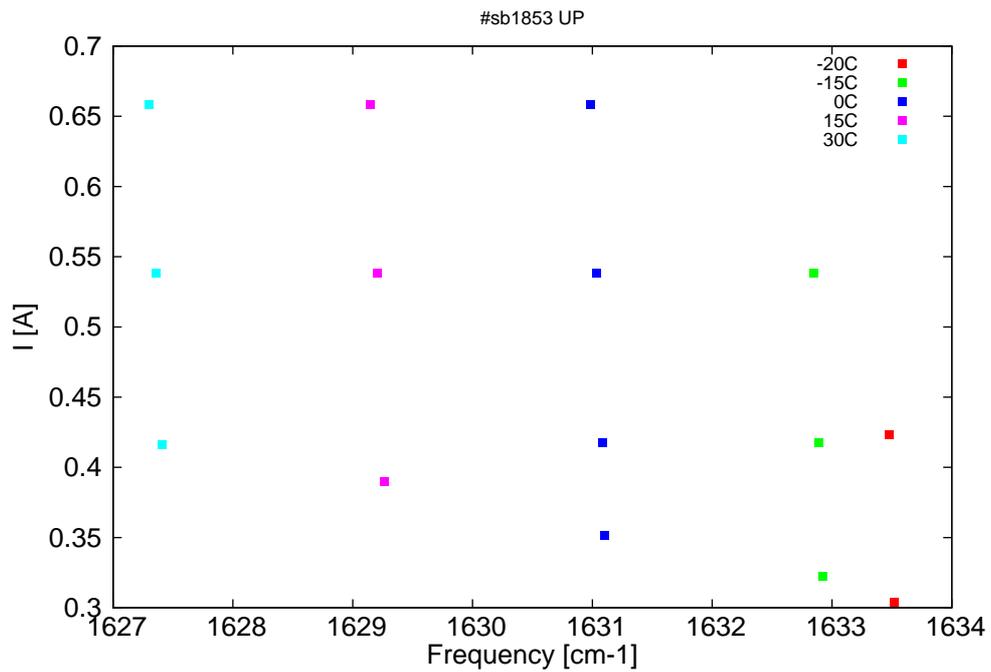


Figure 3: Peak current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{pulse} [V]	I_{pulse} [A]
6121.7	1633.5	0	-20	8	0.3
6121.9	1633.5	1.2	-20	8.5	0.42
6124	1632.9	0.2	-15	8	0.32
6124.1	1632.9	1.2	-15	8.4	0.42
6124.3	1632.8	2.5	-15	8.9	0.54
6130.8	1631.1	0.2	0	8	0.35
6130.9	1631.1	0.7	0	8.3	0.42
6131.1	1631	2	0	8.7	0.54
6131.3	1631	3.2	0	9.2	0.66
6137.8	1629.3	0.2	15	8	0.39
6138	1629.2	1.5	15	8.6	0.54
6138.2	1629.1	2.7	15	9.1	0.66
6144.7	1627.4	0.1	30	8	0.42
6144.9	1627.4	1.1	30	8.5	0.54
6145.1	1627.3	2.2	30	9	0.66

Table 1: Singlemode optical output power as function of operating parameters.

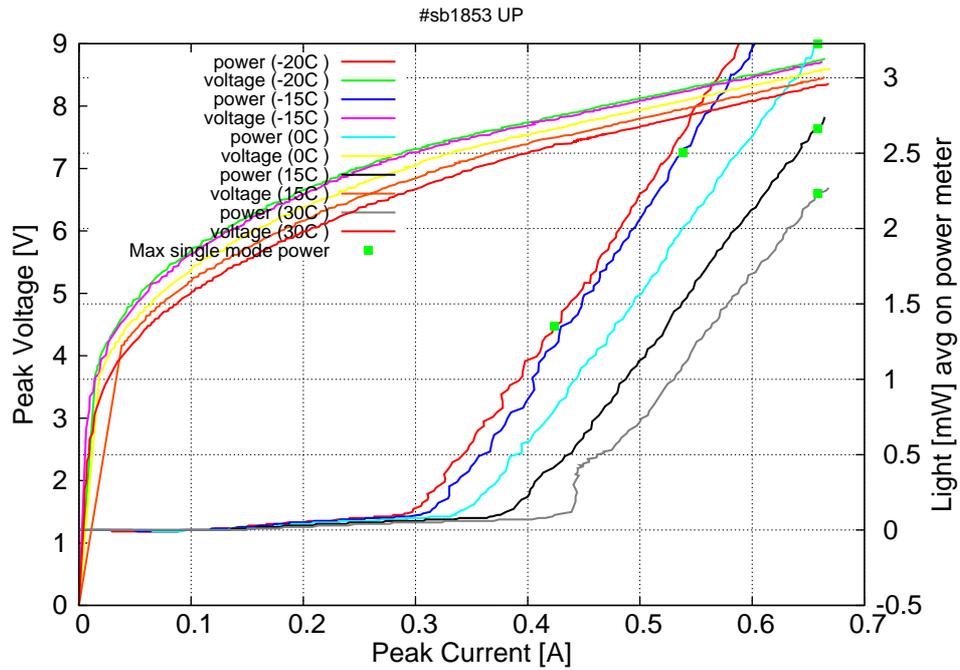


Figure 4: Peak voltage and average power vs peak current at 2% duty-cycle (500ns pulses on the laser) (the solid squares indicate the maximum singlemode emitted power)

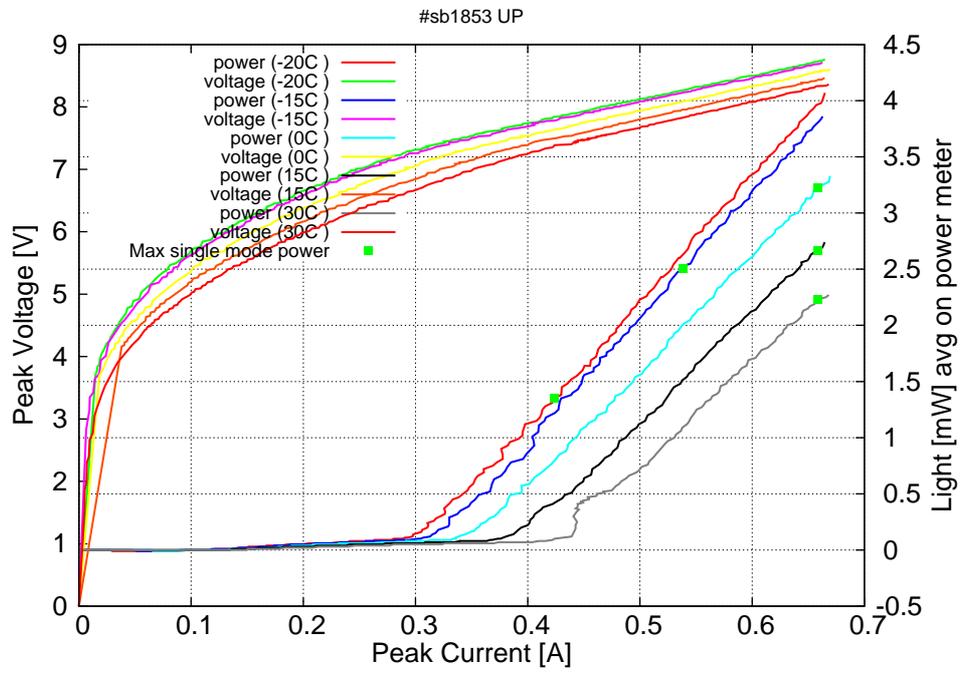
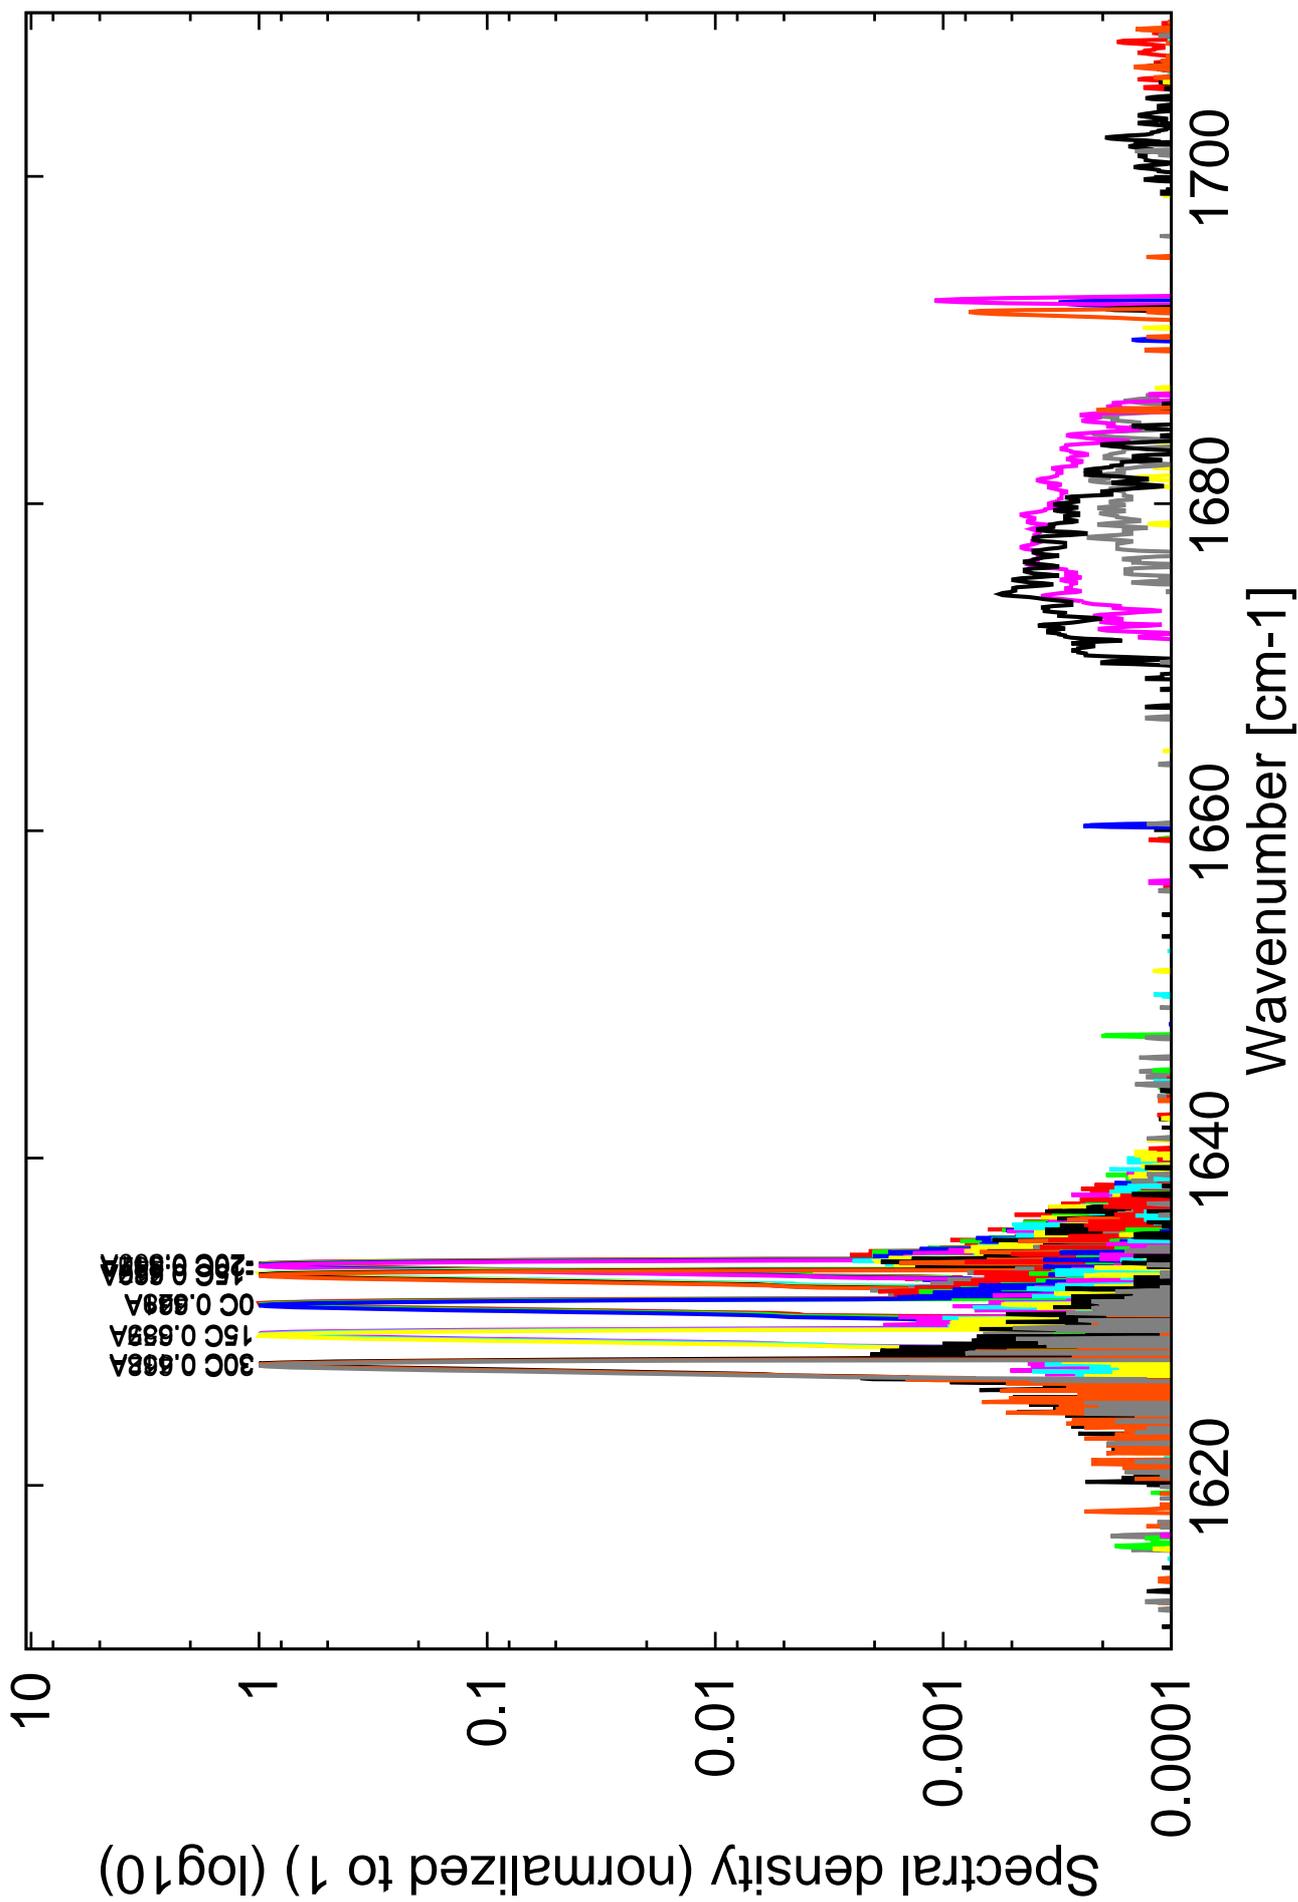


Figure 5: Peak voltage and average power vs peak current at 2% duty-cycle (500ns pulses on the laser) (including the multimode region)

Figure 4: spectra at different temperature for various peak currents (20ns pulses on the laser)



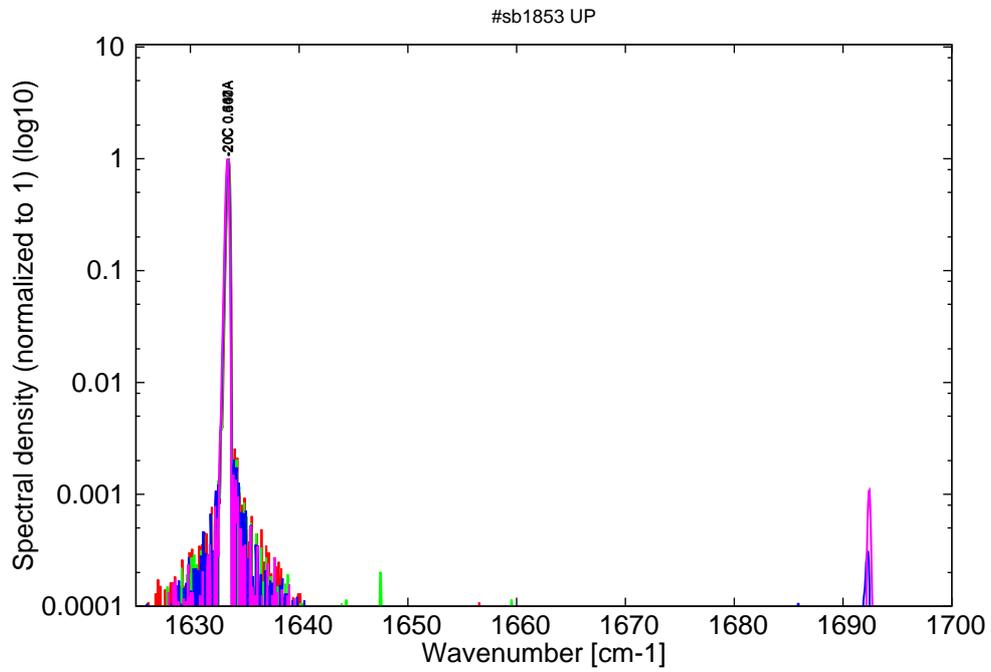


Figure 6: spectra at -20C for various peak currents (monomode up to 0.42A, then become bimode)

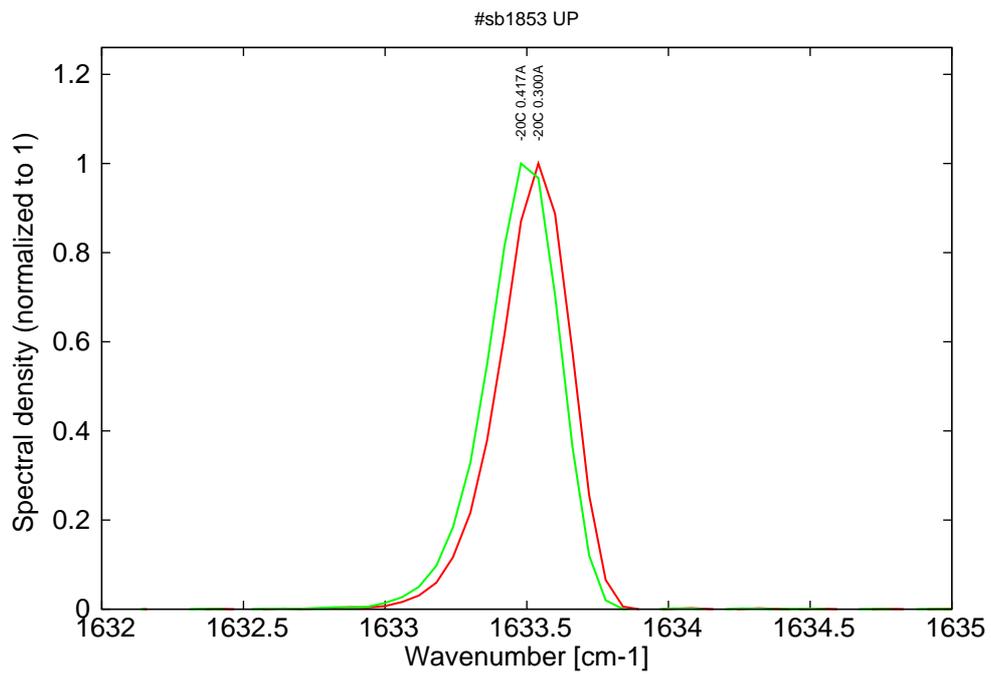


Figure 7: spectra at -20C for various peak currents (monomode range)

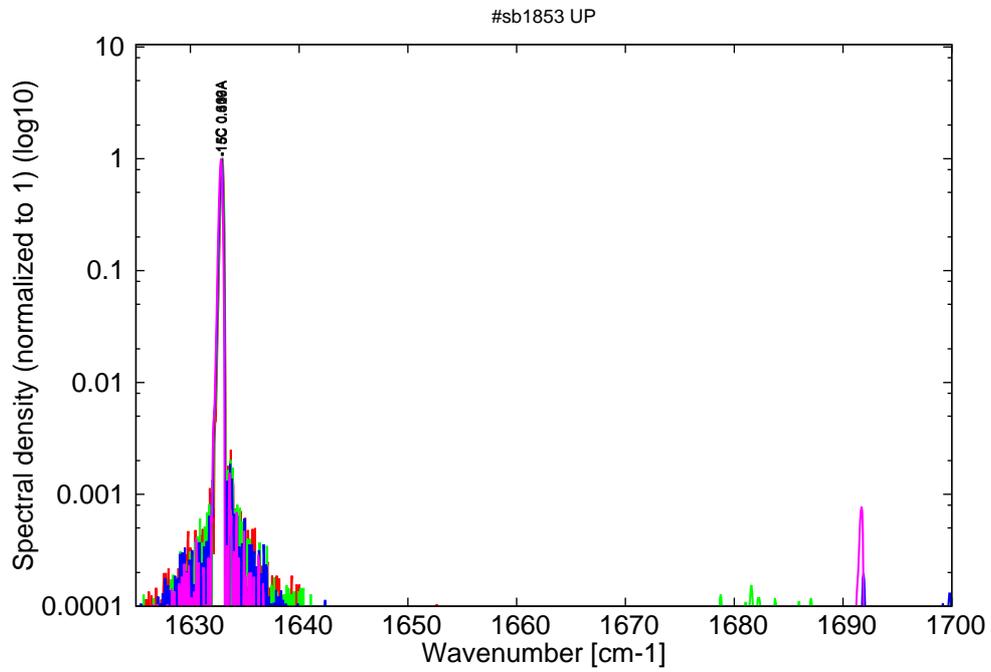


Figure 8: spectra at -15C (monomode up to 0.54A, then become bimode)

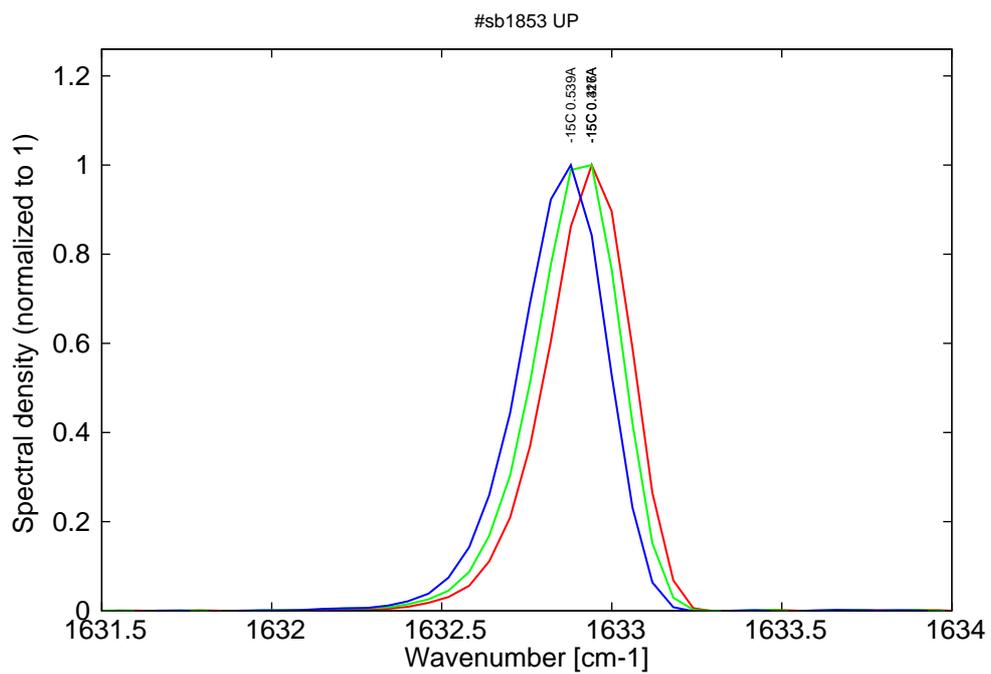


Figure 9: spectra at -15C for various peak currents (monomode range)

Figure 9: spectra between 0C and 30C for various peak currents (all monomode)

