

Datasheet for #sbcw1533 UP
Recommendations:

Please read the starter kit user manual (at least installation chapter 5), if available, and have a look at the FAQ at <http://www.alpeslasers.ch/alphaq.pdf>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.

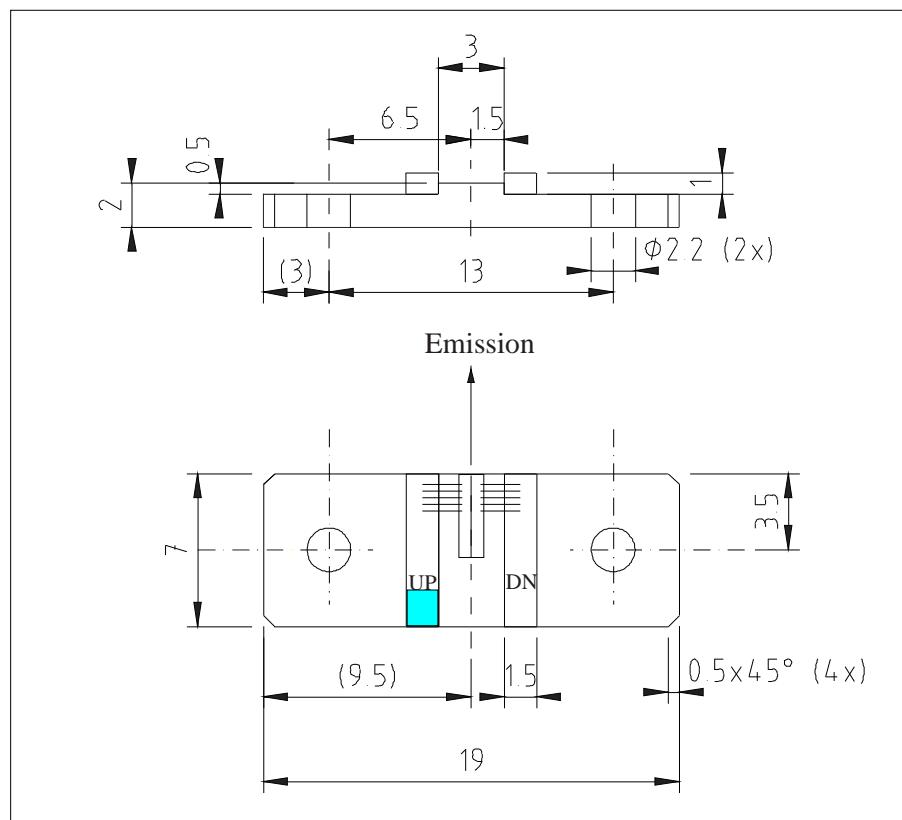


Figure 1: Support mounting for #sbcw1533 UP (please note that the laser is connected to the UP pad drawn in blue)

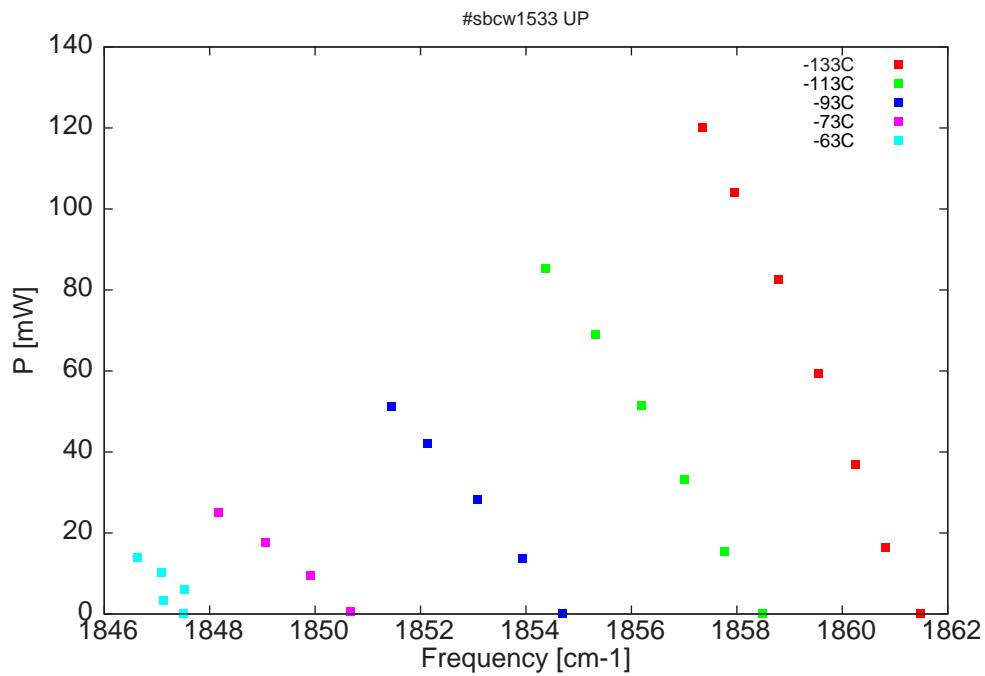


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

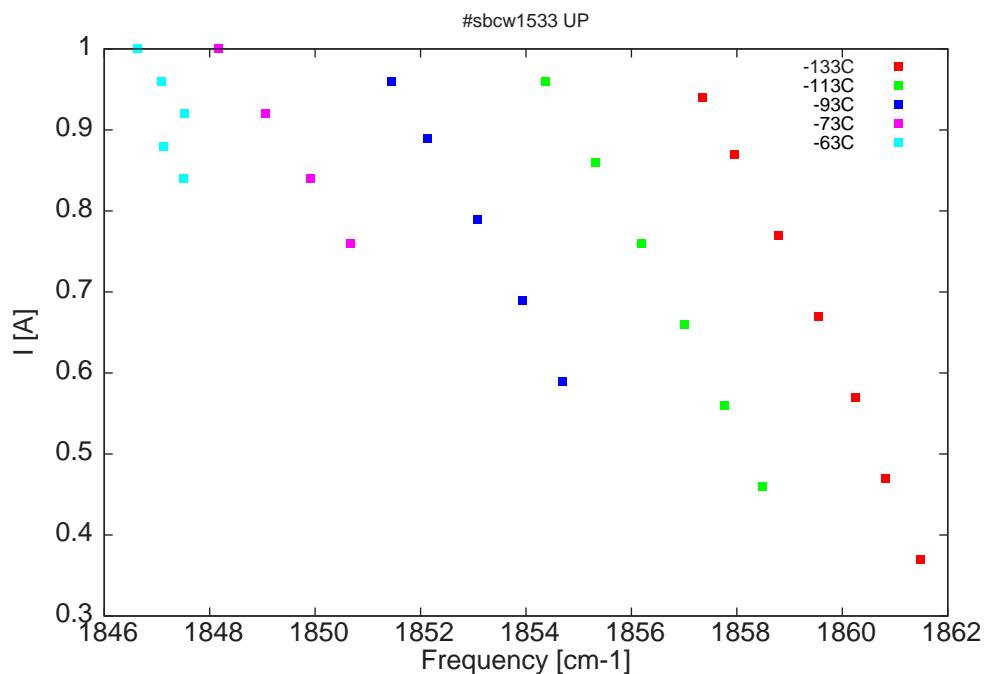


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm $^{-1}$]	P[mW]	Temp[°C]	U $_{LASER}$ [V]	I[A]
5372.1	1861.5	0.1	-133	7.5	0.37
5374	1860.8	16.5	-133	7.7	0.47
5375.6	1860.3	37	-133	7.9	0.57
5377.7	1859.5	59.4	-133	8.1	0.67
5379.8	1858.8	82.5	-133	8.3	0.77
5382.2	1858	104.2	-133	8.5	0.87
5384	1857.4	120.1	-133	8.7	0.94
5380.7	1858.5	0.1	-113	7.6	0.46
5382.8	1857.8	15.4	-113	7.8	0.56
5385	1857	33.1	-113	8	0.66
5387.4	1856.2	51.5	-113	8.2	0.76
5389.9	1855.3	69	-113	8.3	0.86
5392.7	1854.4	85.3	-113	8.5	0.96
5391.7	1854.7	0.1	-93	7.7	0.59
5393.9	1853.9	13.8	-93	7.9	0.69
5396.4	1853.1	28.4	-93	8	0.79
5399.2	1852.1	42.1	-93	8.2	0.89
5401.2	1851.5	51.2	-93	8.3	0.96
5403.4	1850.7	0.6	-73	7.9	0.76
5405.7	1849.9	9.5	-73	8.1	0.84
5408.1	1849.1	17.7	-73	8.2	0.92
5410.7	1848.2	25	-73	8.3	1
5412.7	1847.5	0.2	-63	7.9	0.84
5413.8	1847.1	3.3	-63	8	0.88
5412.7	1847.5	6.2	-63	8.1	0.92
5413.9	1847.1	10.3	-63	8.2	0.96
5415.3	1846.6	13.9	-63	8.2	1

Table 1 : singlemode optical output power as function of operating parameters

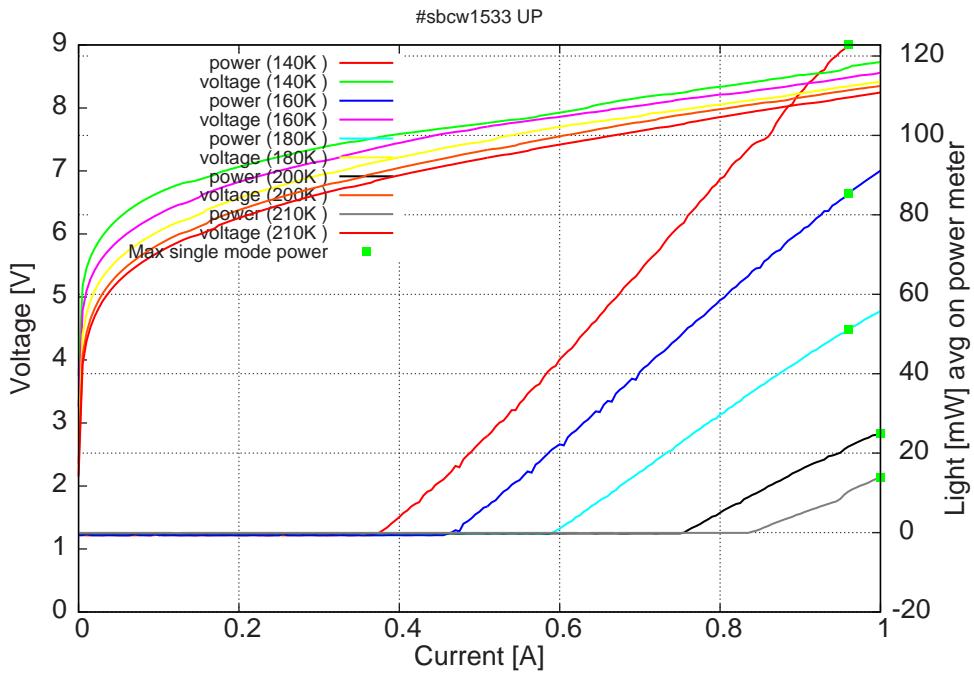


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

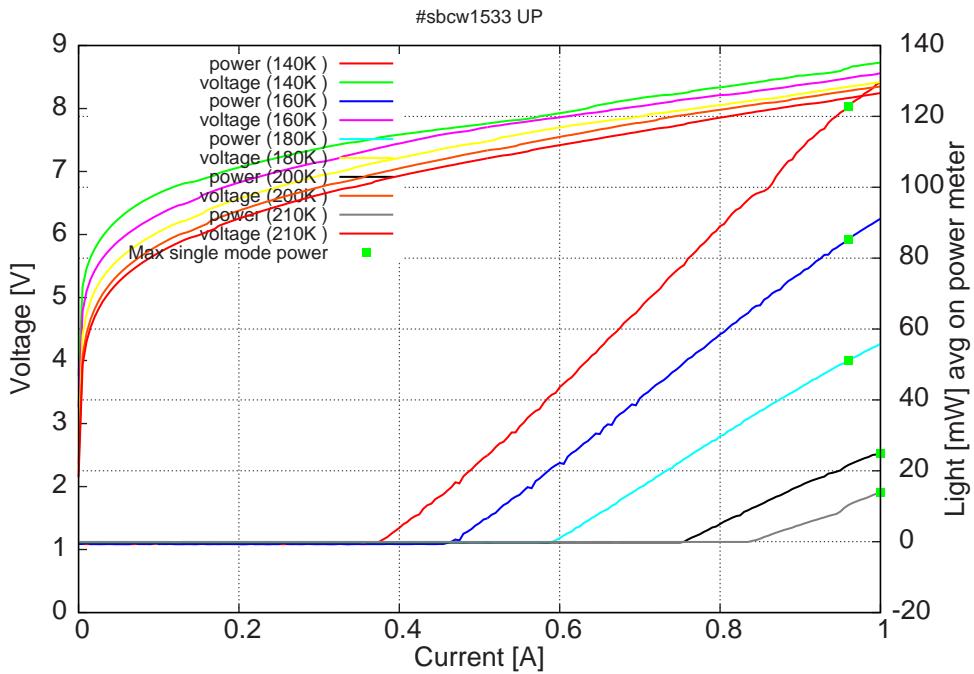
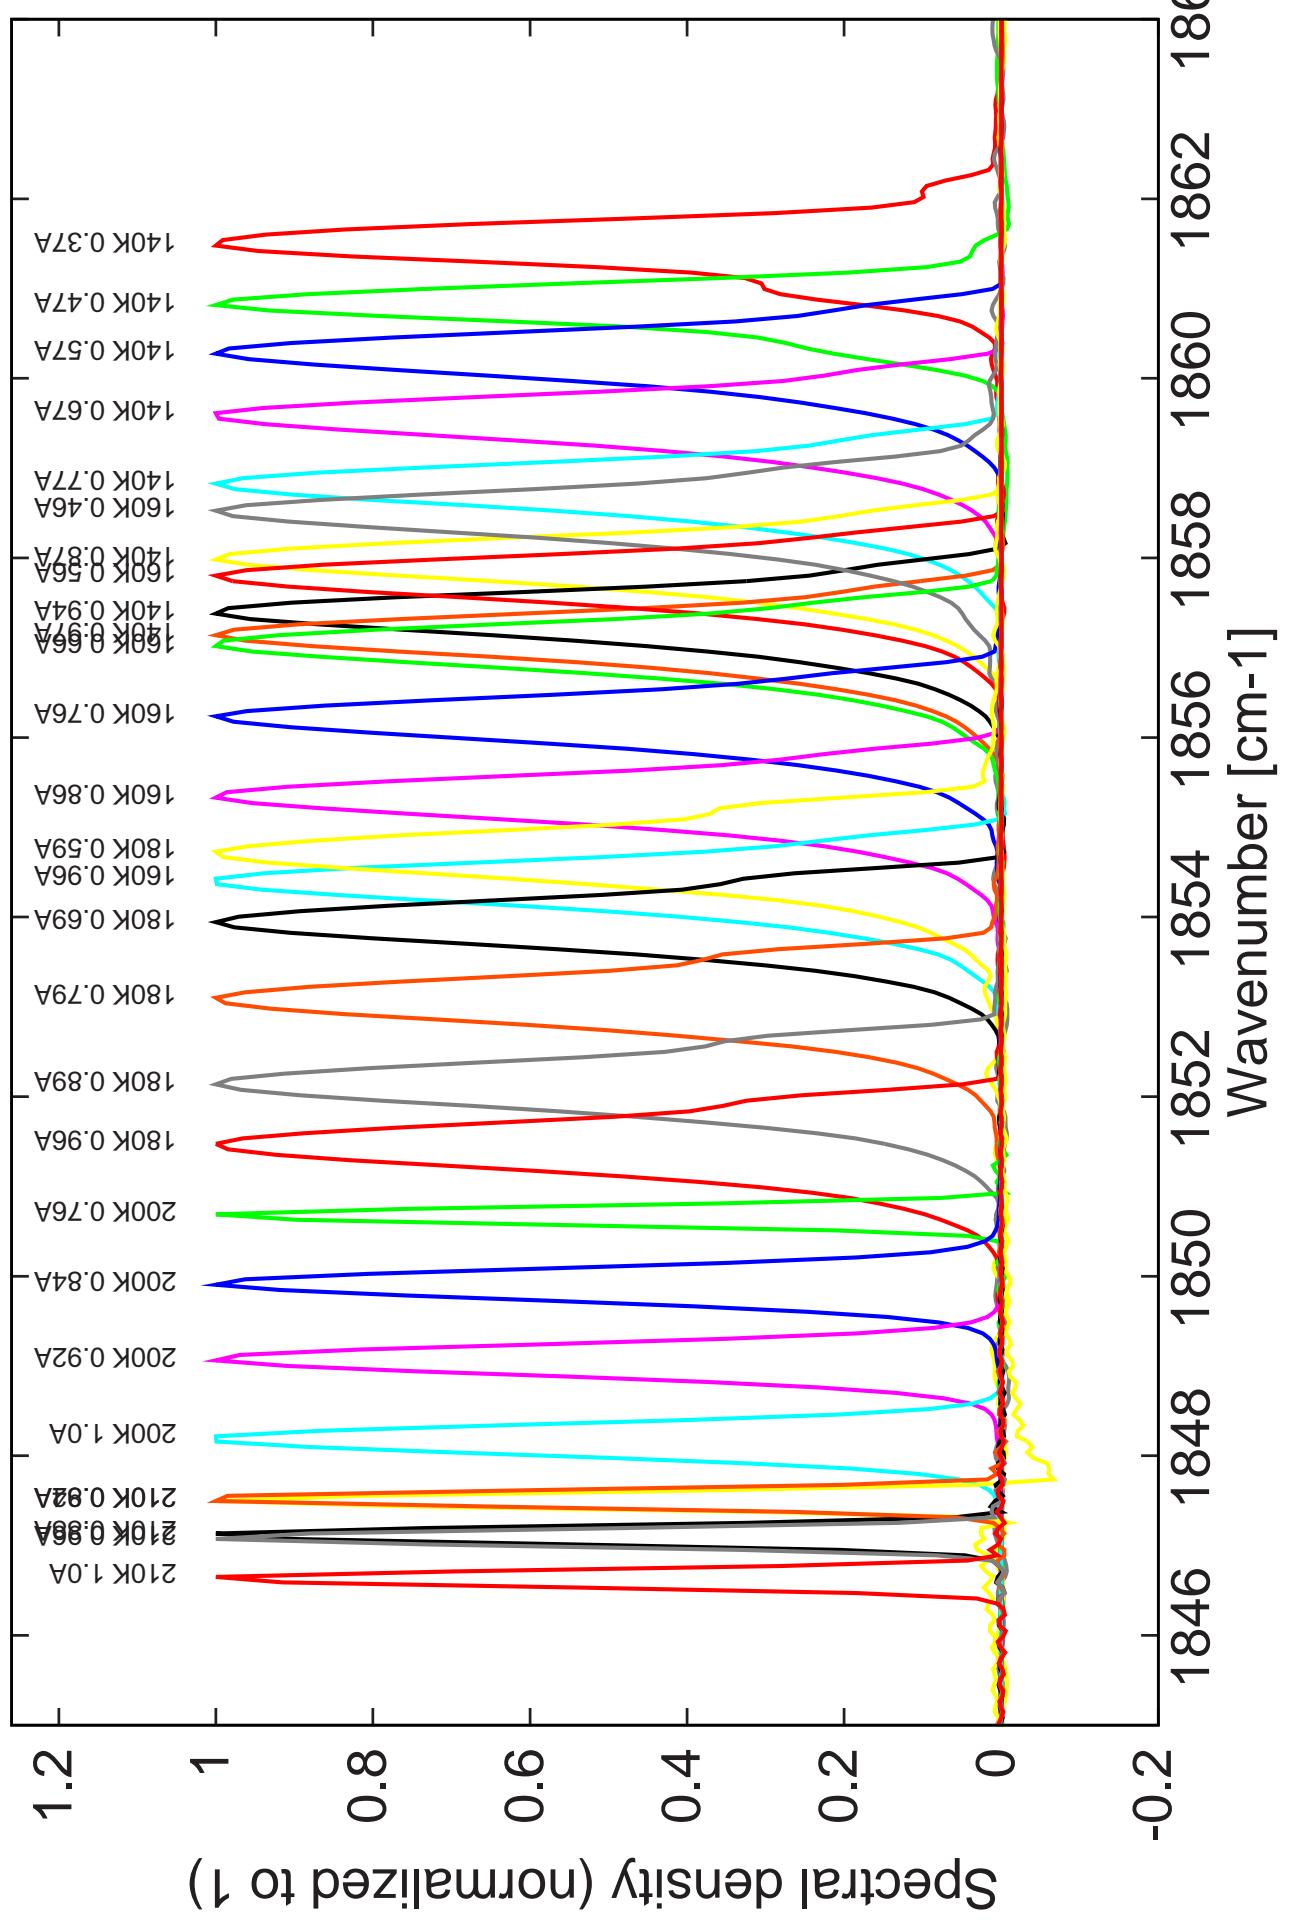


Figure 5: voltage and avg power vs current in continuous-wave operation (including the multimode region)

Note: at 80K: $I_{th}=370\text{mA}$ / $V_{th}= 7.52\text{V}$ (2-wires measurements). Maximum operation current: 1.0A for all temperatures.

Figure 4: spectra at different temperatures for various DC currents



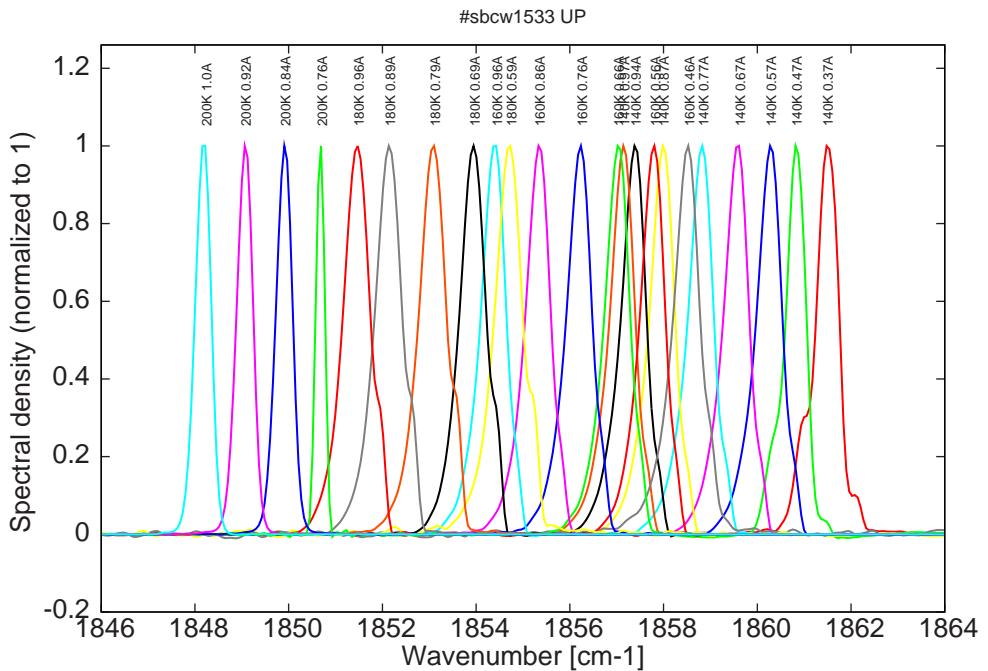


Figure 6: spectra at 140K, 160K, 180K and 200K for various DC currents

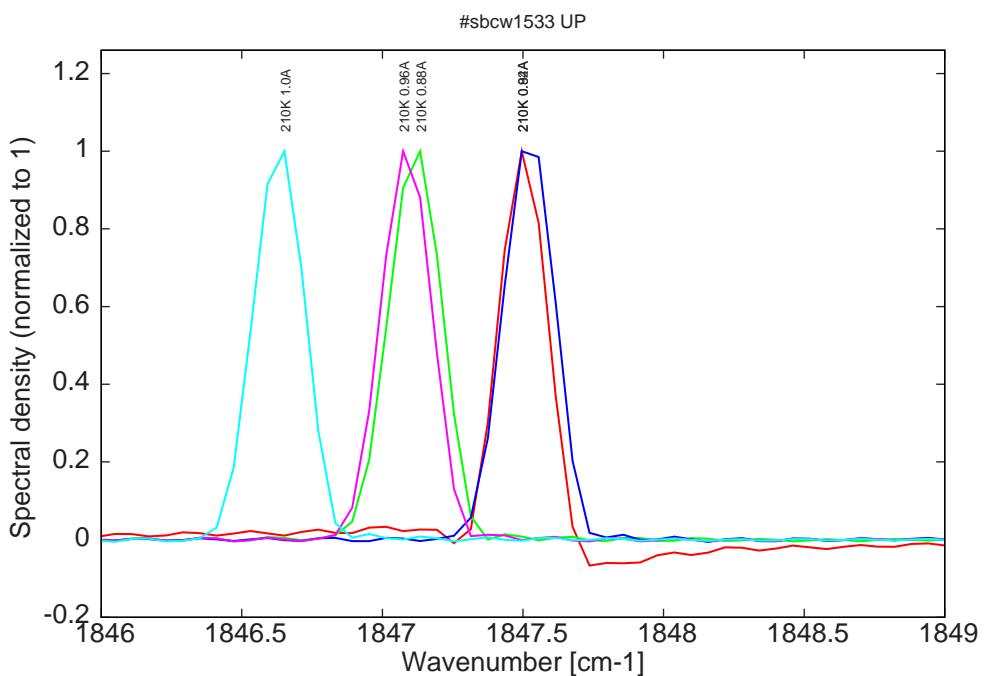


Figure 7: spectra at 210K for various DC currents (same mode as the other temperatures for $I < 0.88\text{A}$, mode jumping for $I > 0.88\text{A}$, see Fig. 1)