

**Datasheet for #sbcw1910 DN**

Recommendations:

Please read the starter kit user manual (at least installation chapter 5), if available, and have a look at the FAQ at <http://www.alpeslasers.ch/alfaq.pdf>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.



Figure 1: Support mounting for #sbcw1910 DN (please note that the laser is connected to the DN pad drawn in blue)

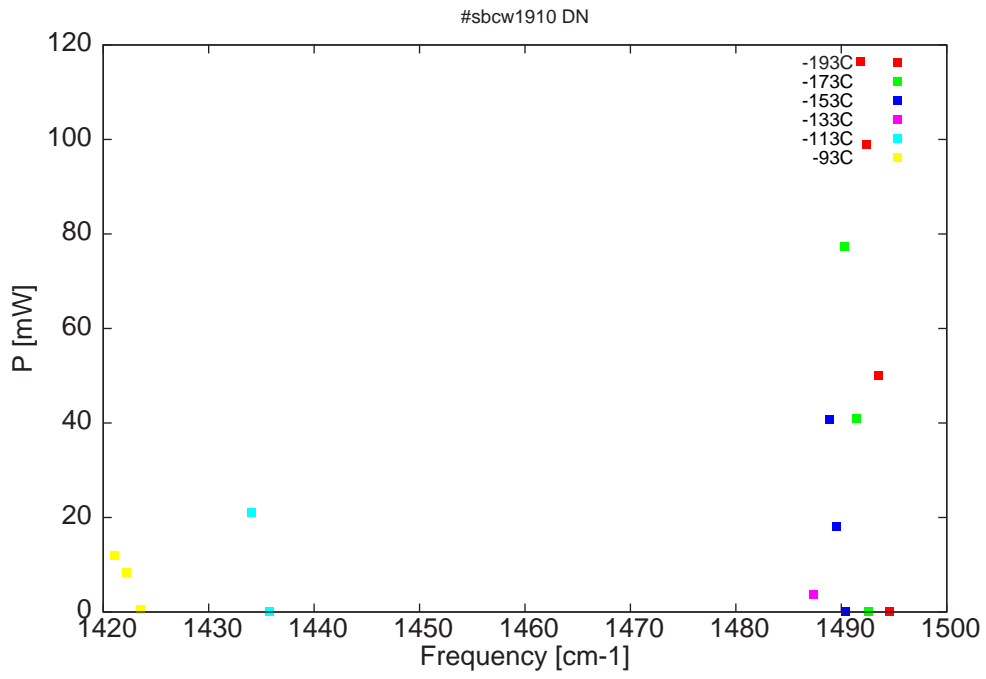


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

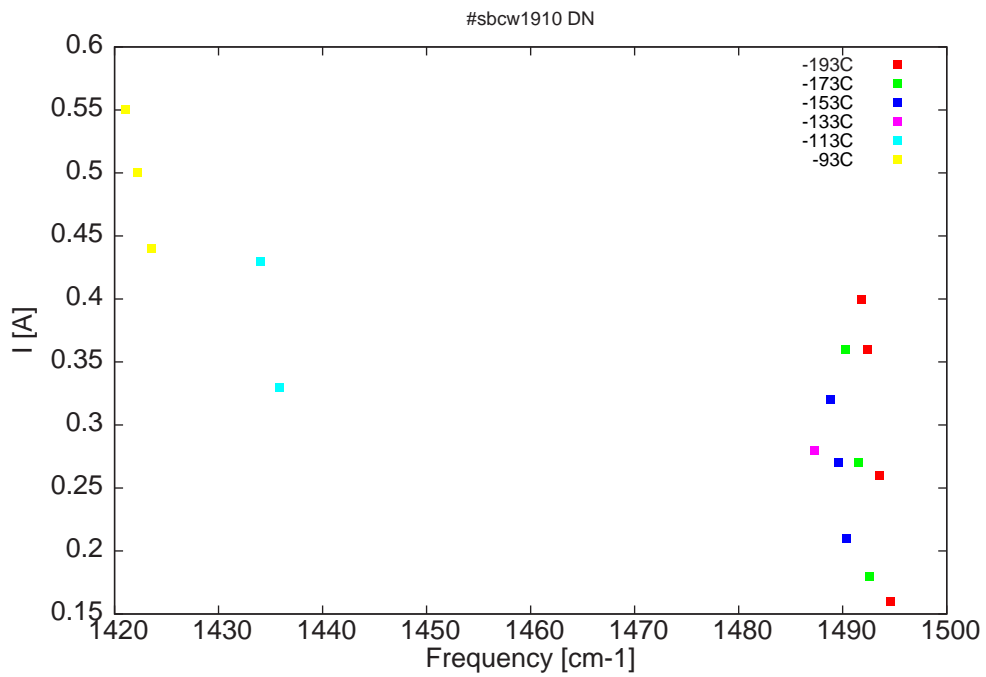


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm <sup>-1</sup> ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
6690.8	1494.6	0.1	-193	11	0.16
6695.6	1493.5	50.1	-193	11.4	0.26
6700.9	1492.3	99	-193	11.8	0.36
6703.3	1491.8	116.6	-193	11.9	0.4
6699.8	1492.6	0.1	-173	10.8	0.18
6704.7	1491.5	40.9	-173	11.2	0.27
6710	1490.3	77.4	-173	11.5	0.36
6709.6	1490.4	0.1	-153	10.6	0.21
6713.4	1489.6	18.1	-153	10.9	0.27
6716.6	1488.8	40.8	-153	11.1	0.32
6723.4	1487.3	3.6	-133	10.6	0.28
6964.7	1435.8	0.1	-113	10.6	0.33
6973.2	1434.1	21	-113	10.9	0.43
7024.9	1423.5	0.6	-93	10.7	0.44
7031.5	1422.2	8.4	-93	10.9	0.5
7037.2	1421	12.1	-93	11.1	0.55

Table 1 : singlemode optical output power as function of operating parameters

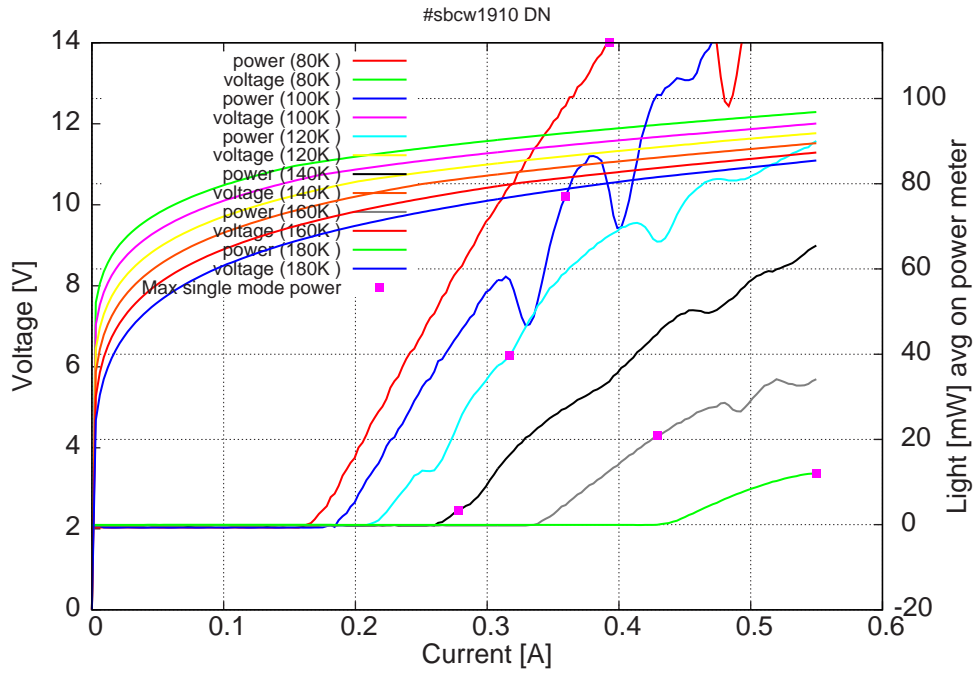


Figure 4: peak voltage and average power vs peak current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

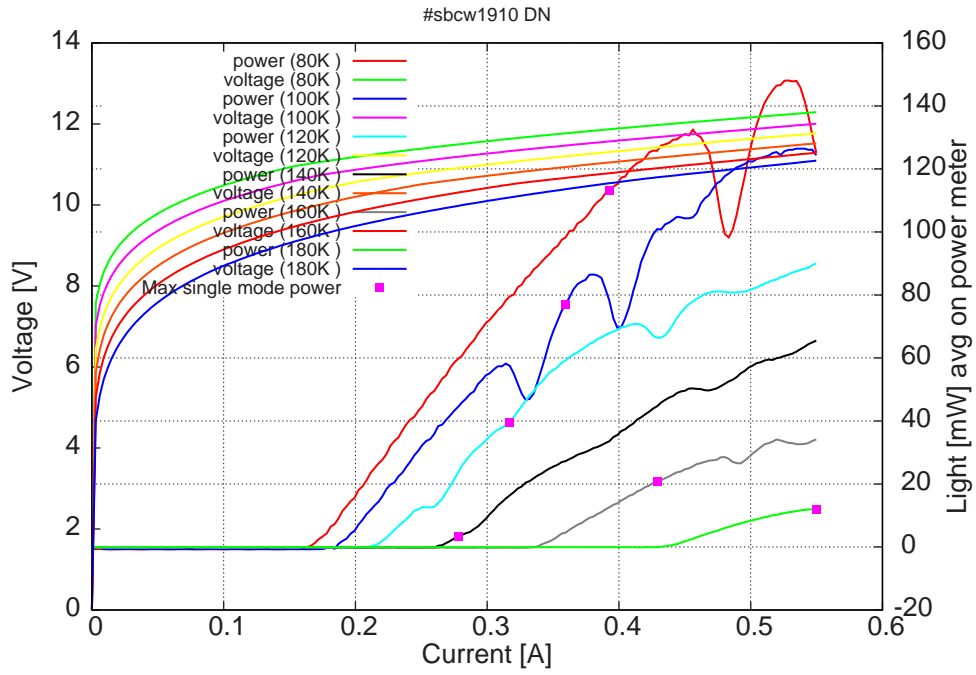
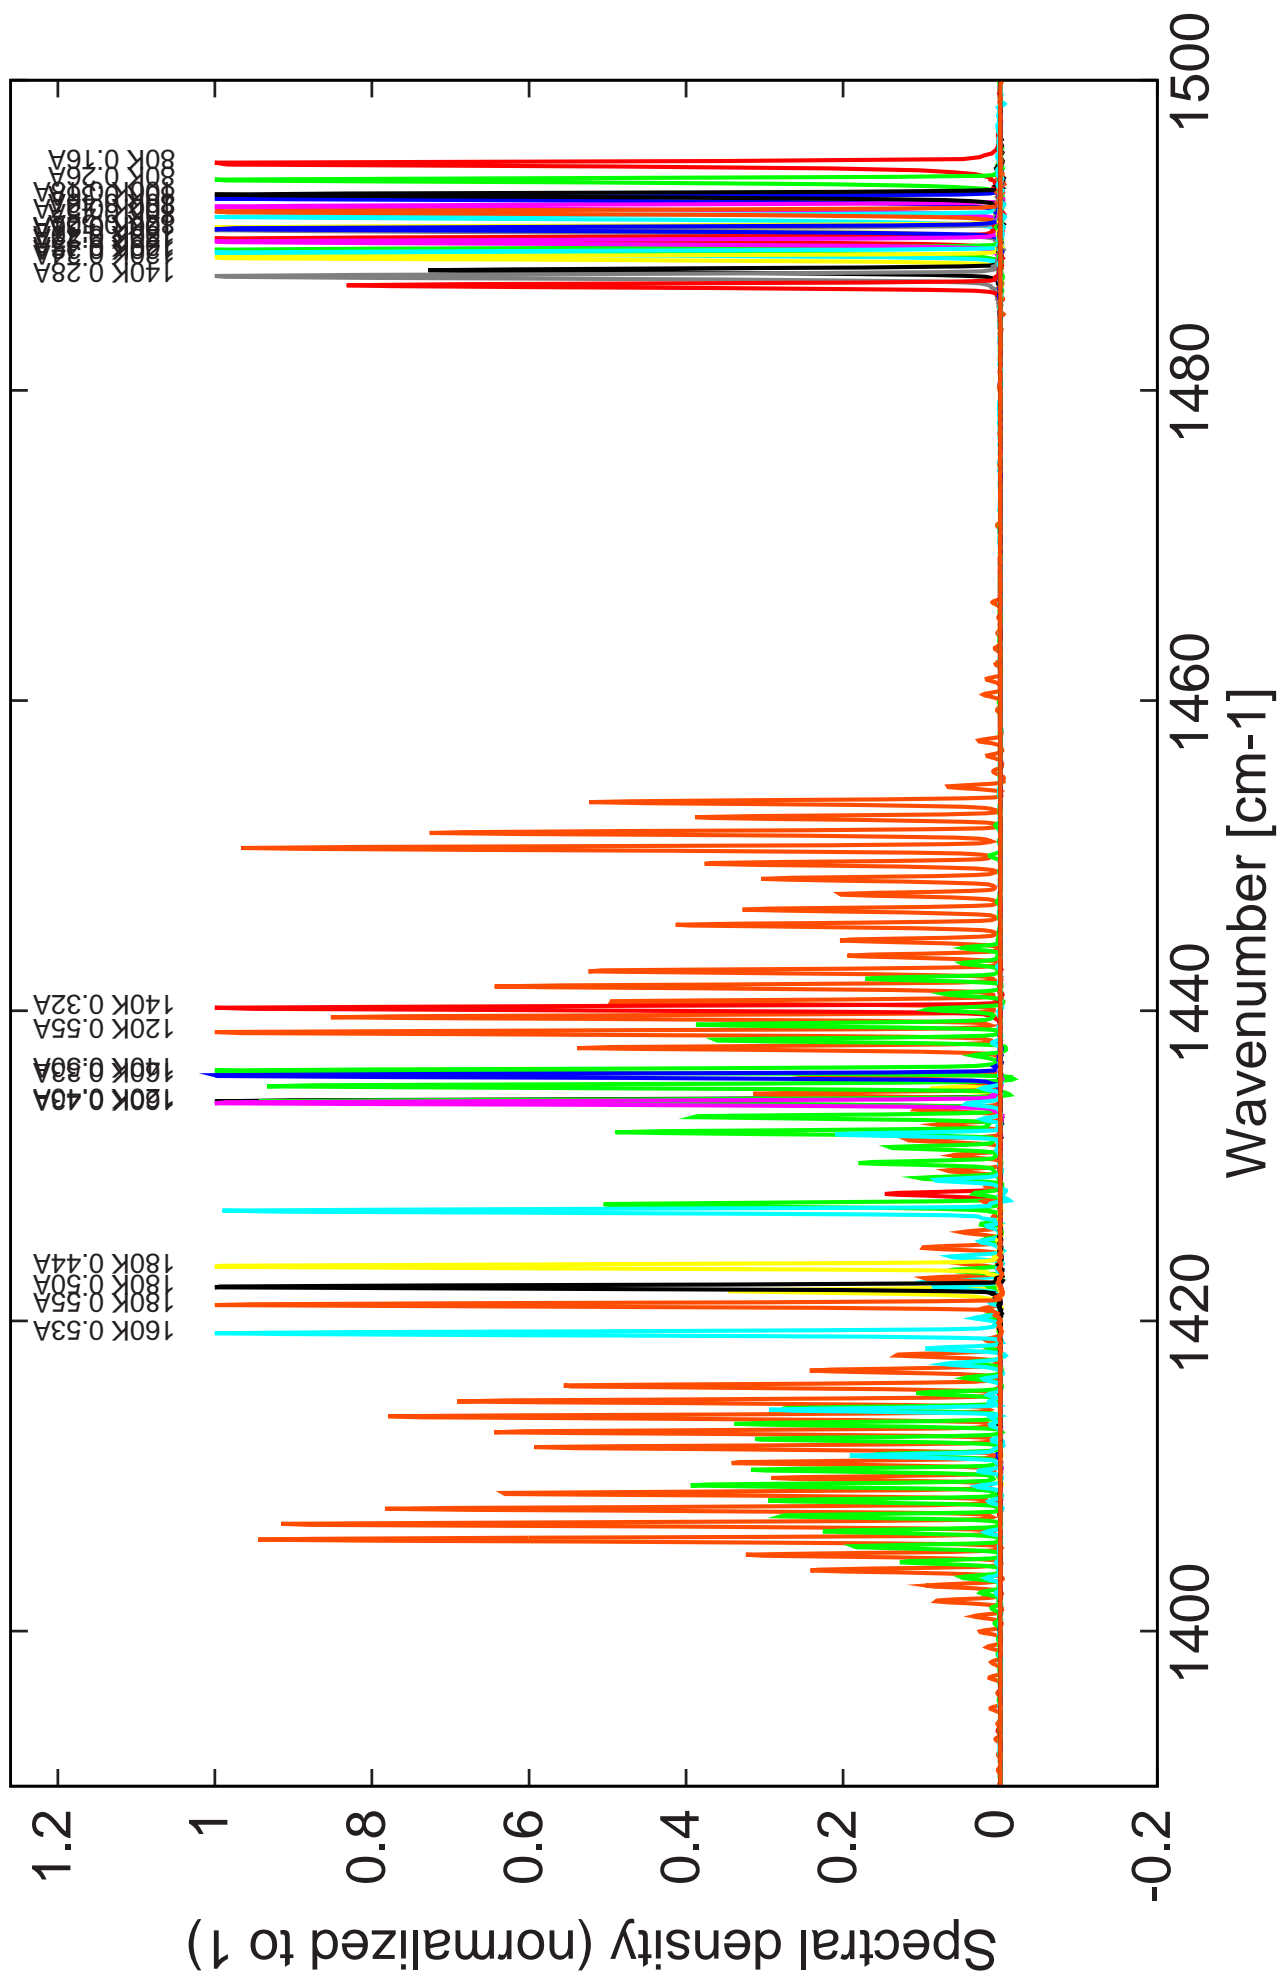


Figure 5: peak voltage and average power vs peak current in continuous-wave operation (including the multimode region)

Note: at 80K:  $I_{th}=160\text{mA}$  /  $V_{th}= 11.0\text{V}$  (2-wires measurements). Maximum operation current: 550mA for all temperatures.

Figure 4: spectra at different temperatures for various DC currents



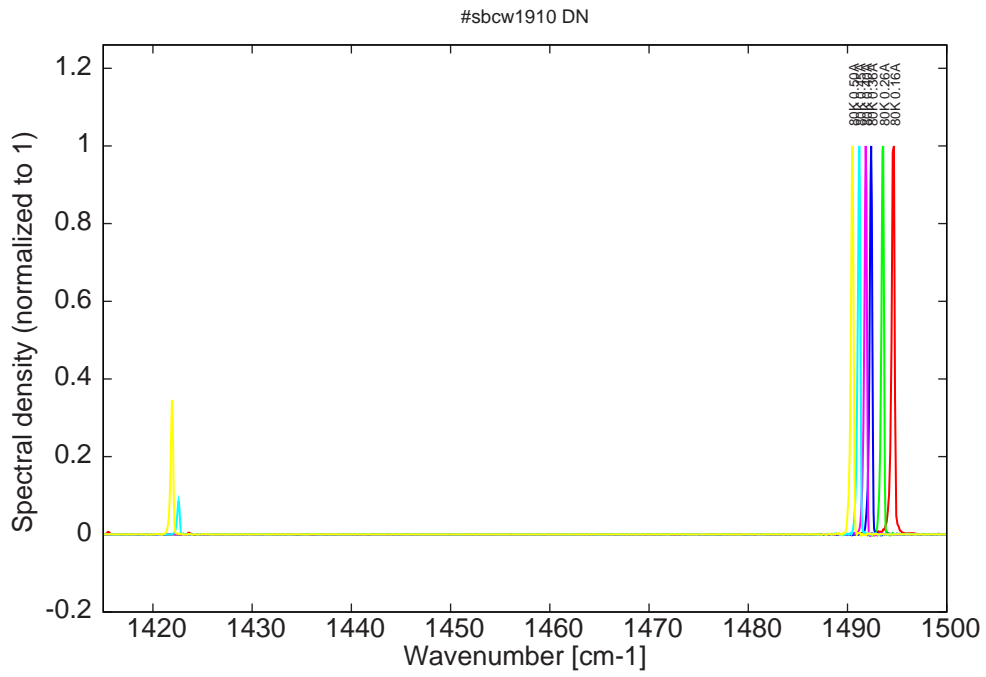


Figure 6: spectra at 80K for various DC currents

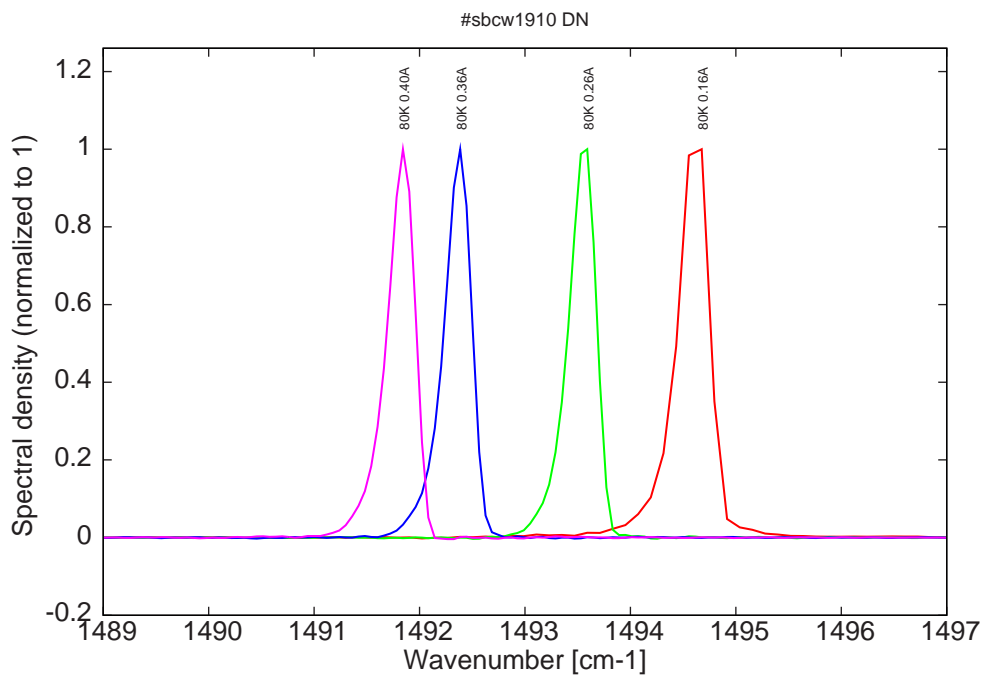


Figure 7: spectra at 80K for various DC currents (monomode range)

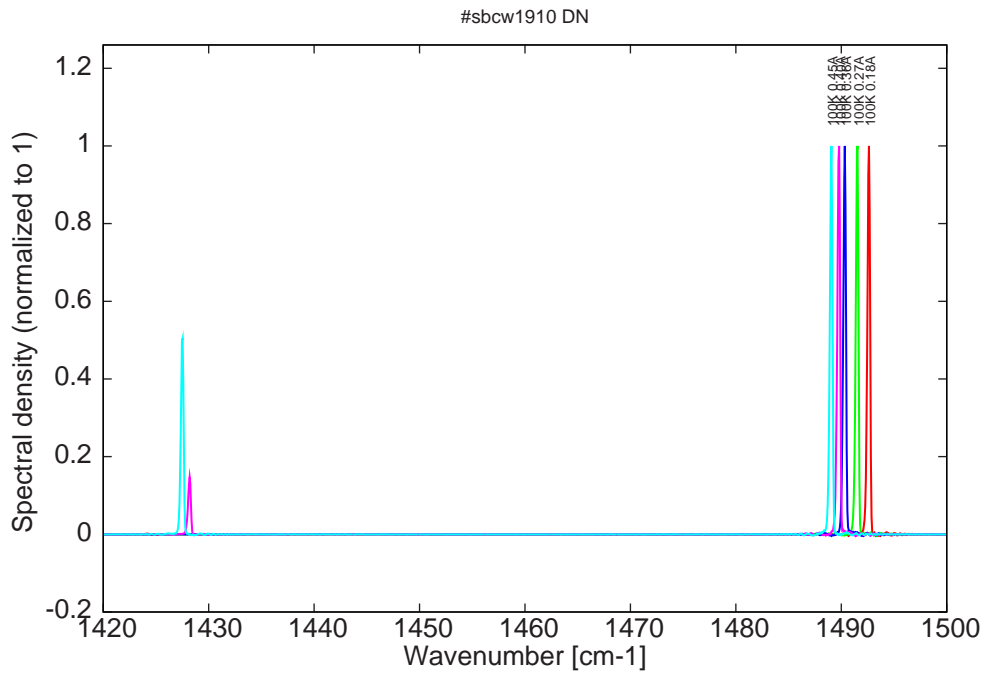


Figure 8: spectra at 100K for various DC currents

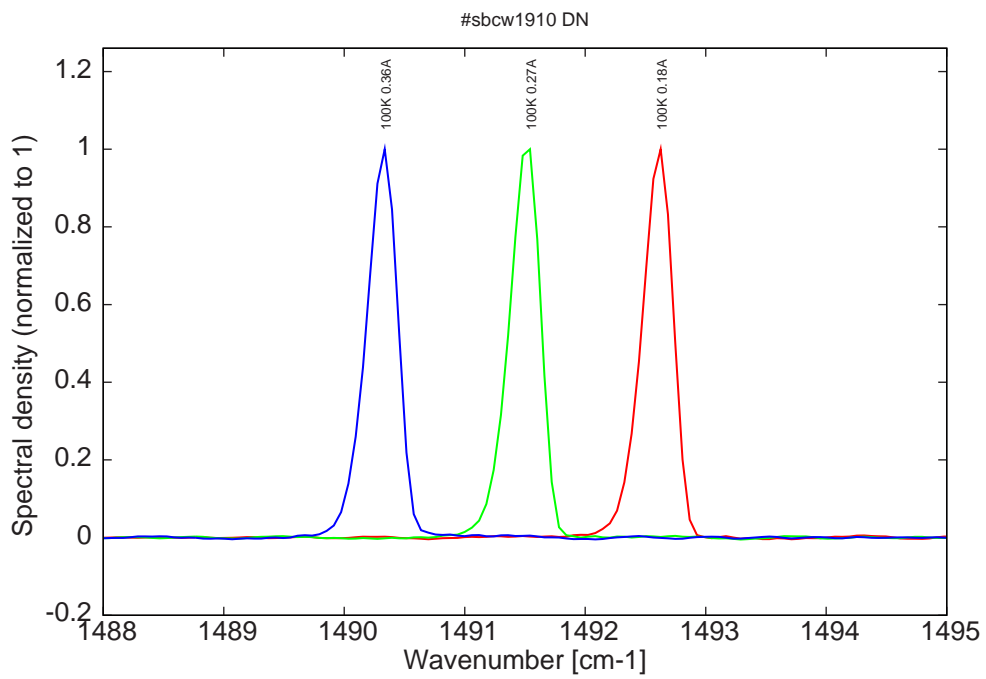


Figure 9: spectra at 100K for various DC currents (monomode range)

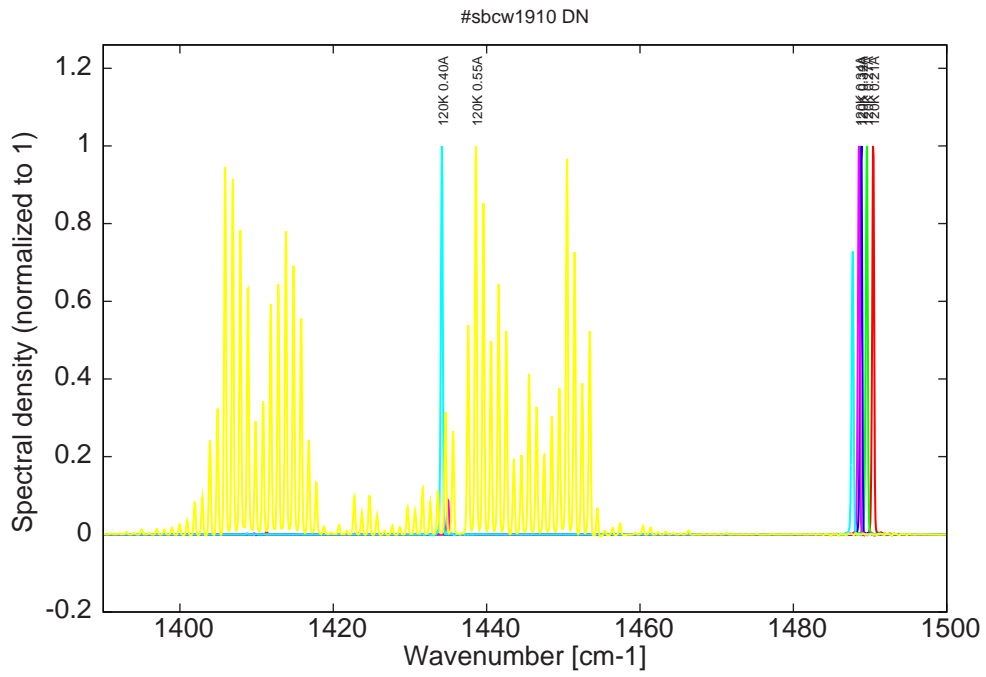


Figure 10: spectra at 120K for various DC currents

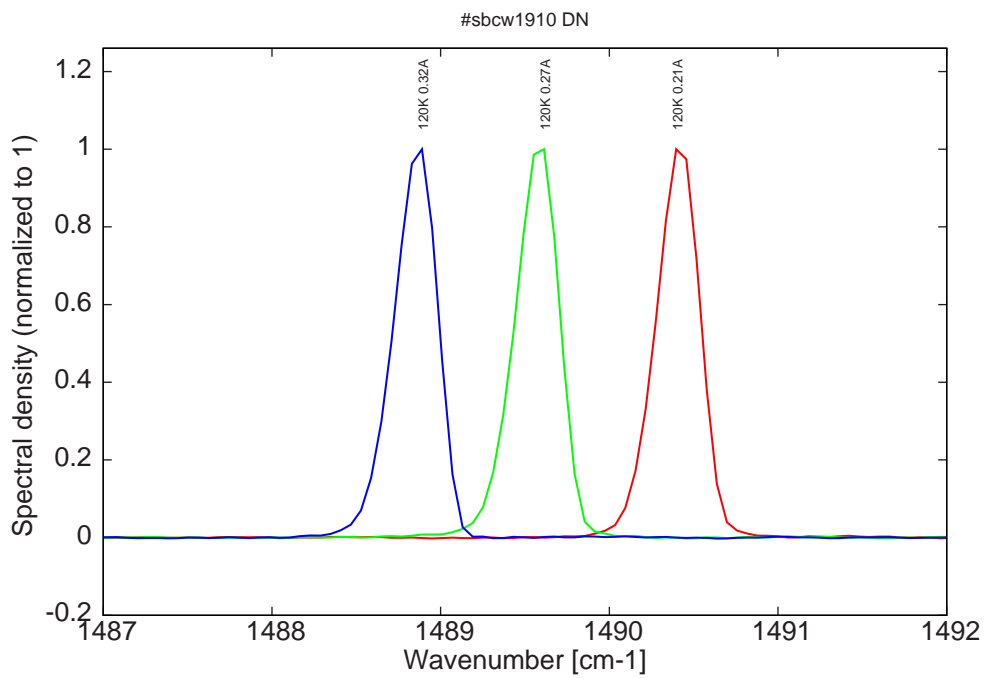


Figure 11: spectra at 120K for various DC currents (monomode range)

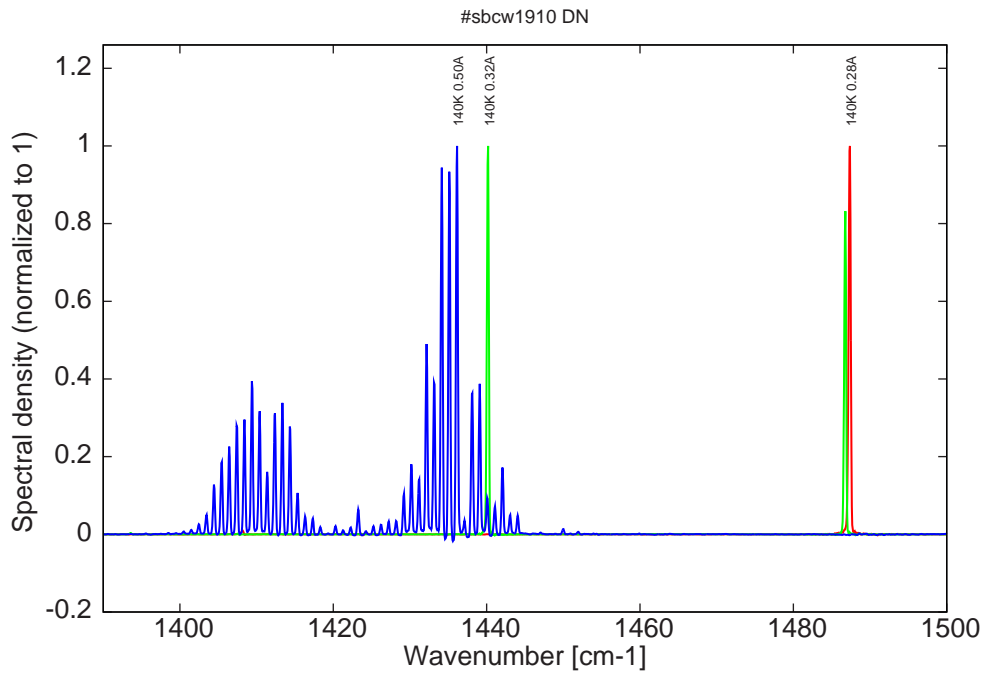


Figure 12: spectra at 140K for various DC currents

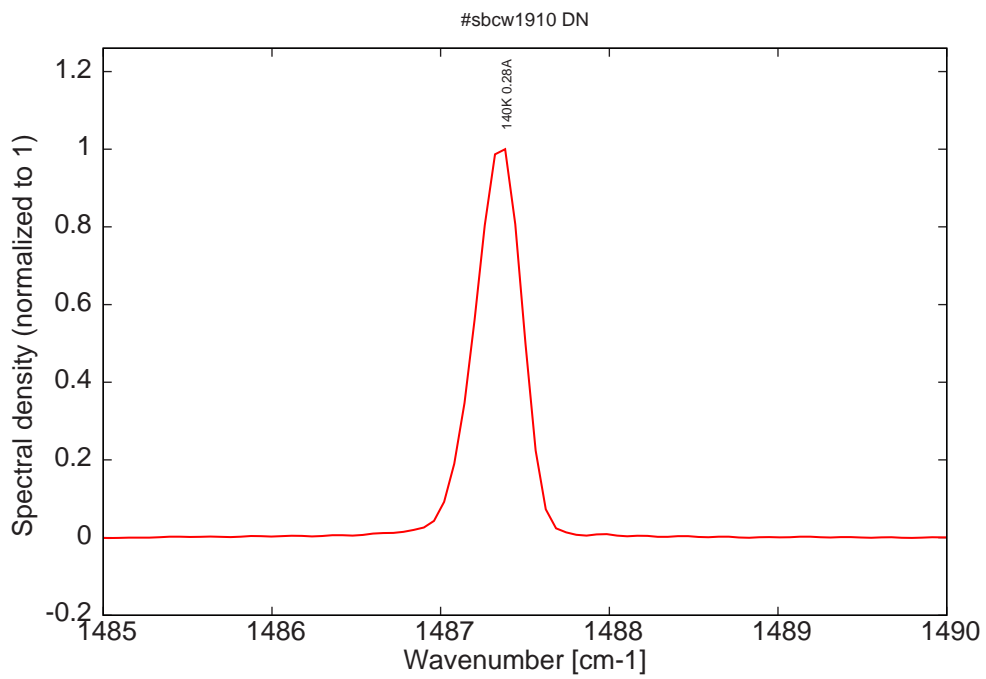


Figure 13: monomode spectrum at 140K at 0.28A (threshold)

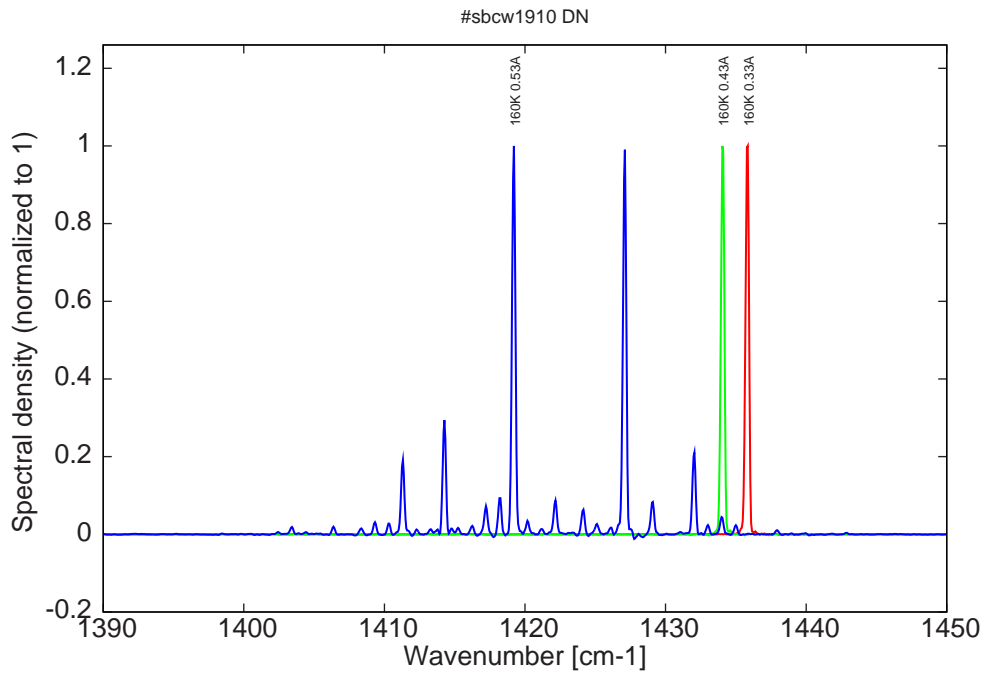


Figure 14: spectra at 160K for various DC currents

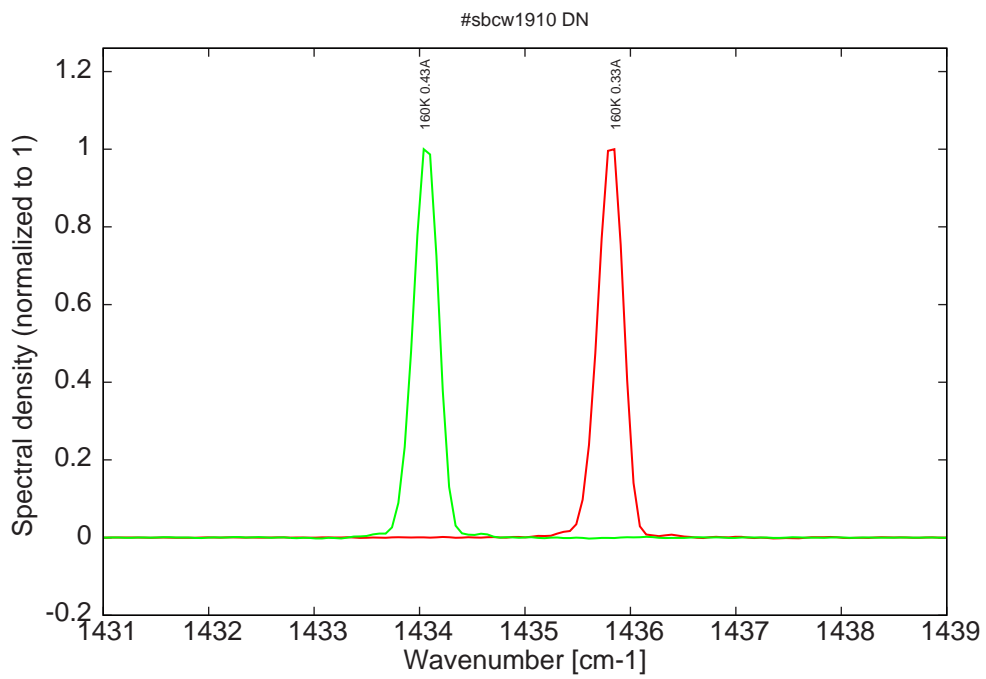


Figure 15: spectra at 160K for various DC currents (monomode range, but on another mode compared to other temperatures, see Fig.1)

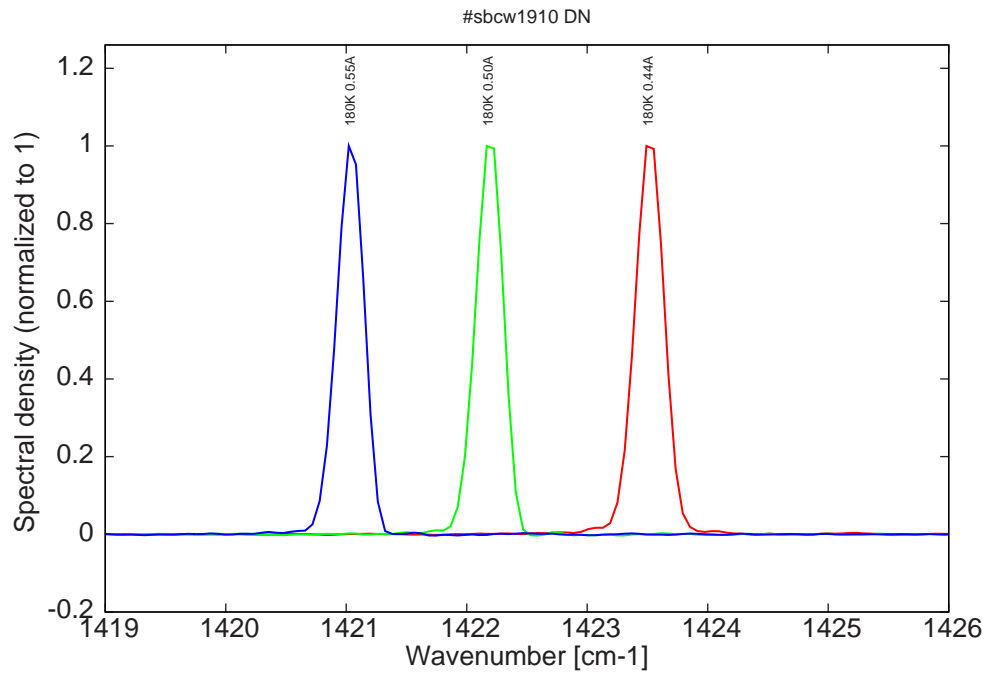


Figure 16: spectra at 180K for various DC currents (all monomode, but on another mode compared to other temperatures, see Fig.1)