

Datasheet for #sb6261 DN

#### Recommendations:

Please read the User Manual and have a look at the FAQ at  
<http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with longer pulses, higher repetition rate, higher voltage or higher current than specified in this document may cause damage. It will result in loss of warranty, unless agreed upon with Alpes Lasers!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative bias and positive bias on the specific zones drawn below.

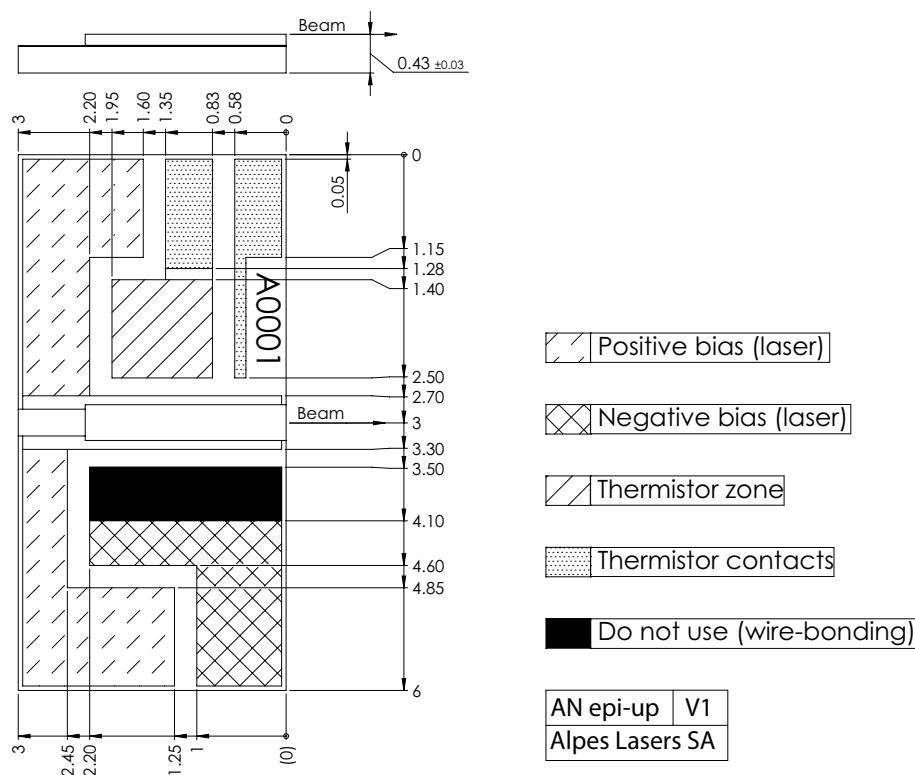


Figure 1: Mechanical and electrical interface for #sb6261 DN (please note that AlN submount numbering is 01302)

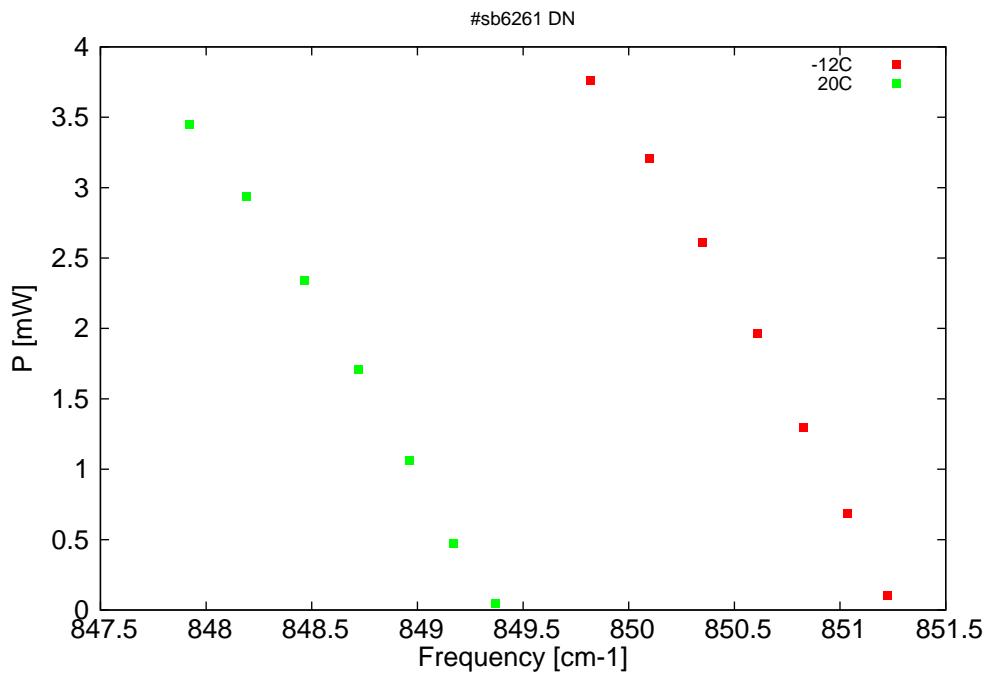


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

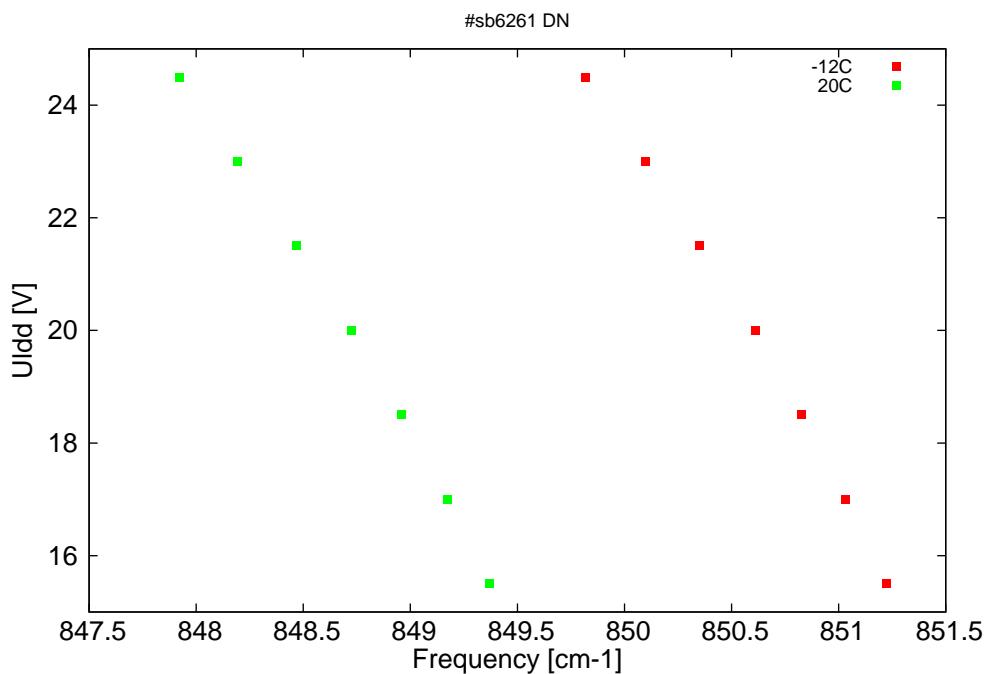


Figure 3: DC voltage fed to LDD ( $U_{ldd}$ ) as a function of the singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm $^{-1}$ ]	P[mW]	Temp[°C]	$U_{LDD}$ [V]	$I_{pulse}$ [A]
11747.8	851.2	0.1	-12	15.5	2.24
11750.4	851	0.7	-12	17	2.55
11753.3	850.8	1.3	-12	18.5	2.8
11756.2	850.6	2	-12	20	3.1
11759.9	850.3	2.6	-12	21.5	3.38
11763.3	850.1	3.2	-12	23	3.62
11767.2	849.8	3.8	-12	24.5	3.85
11773.5	849.4	0.1	20	15.5	2.45
11776.2	849.2	0.5	20	17	2.82
11779.1	849	1.1	20	18.5	3.12
11782.4	848.7	1.7	20	20	3.42
11786	848.5	2.3	20	21.5	3.7
11789.8	848.2	2.9	20	23	3.97
11793.6	847.9	3.5	20	24.5	4.17

Table 1: Singlemode optical output power as function of operating parameters.

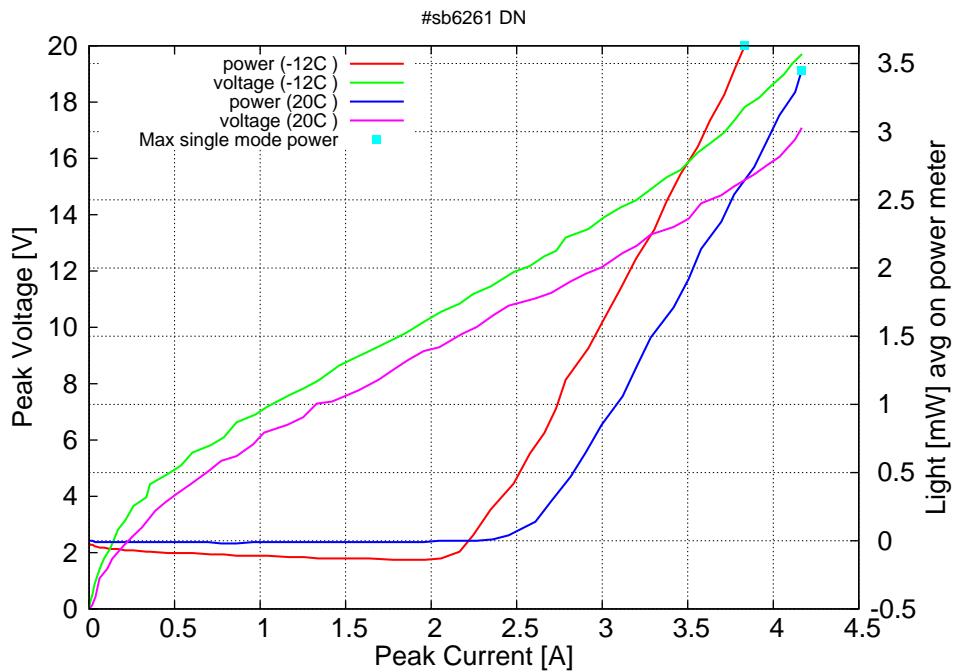


Figure 4: peak voltage and average power vs peak current at 2% duty-cycle (50ns pulses on the laser, 2.5μs period) (the solid squares indicate the maximum singlemode emitted power)

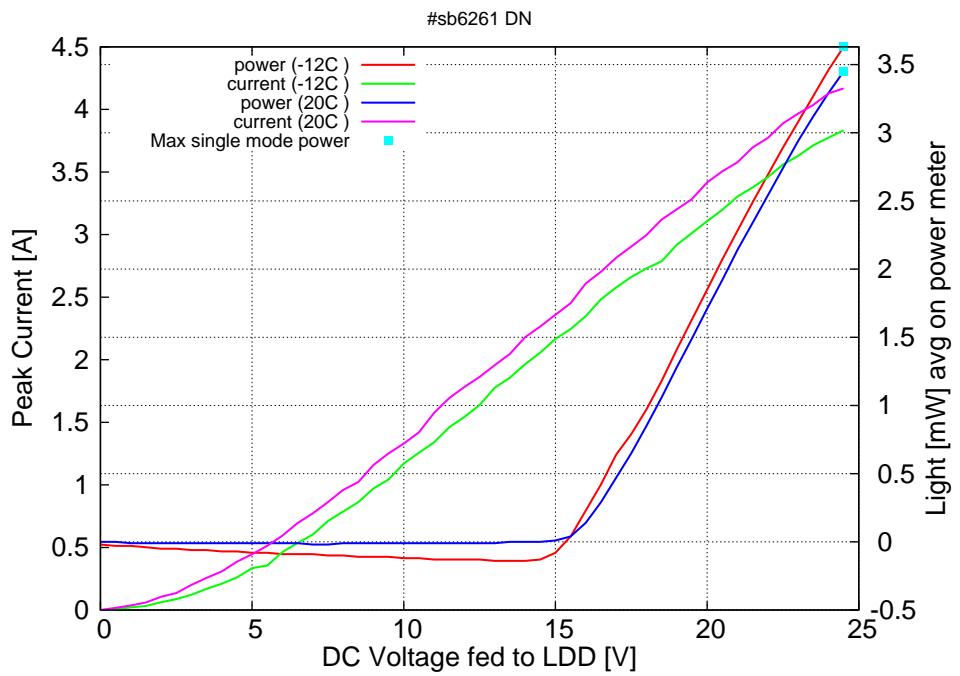
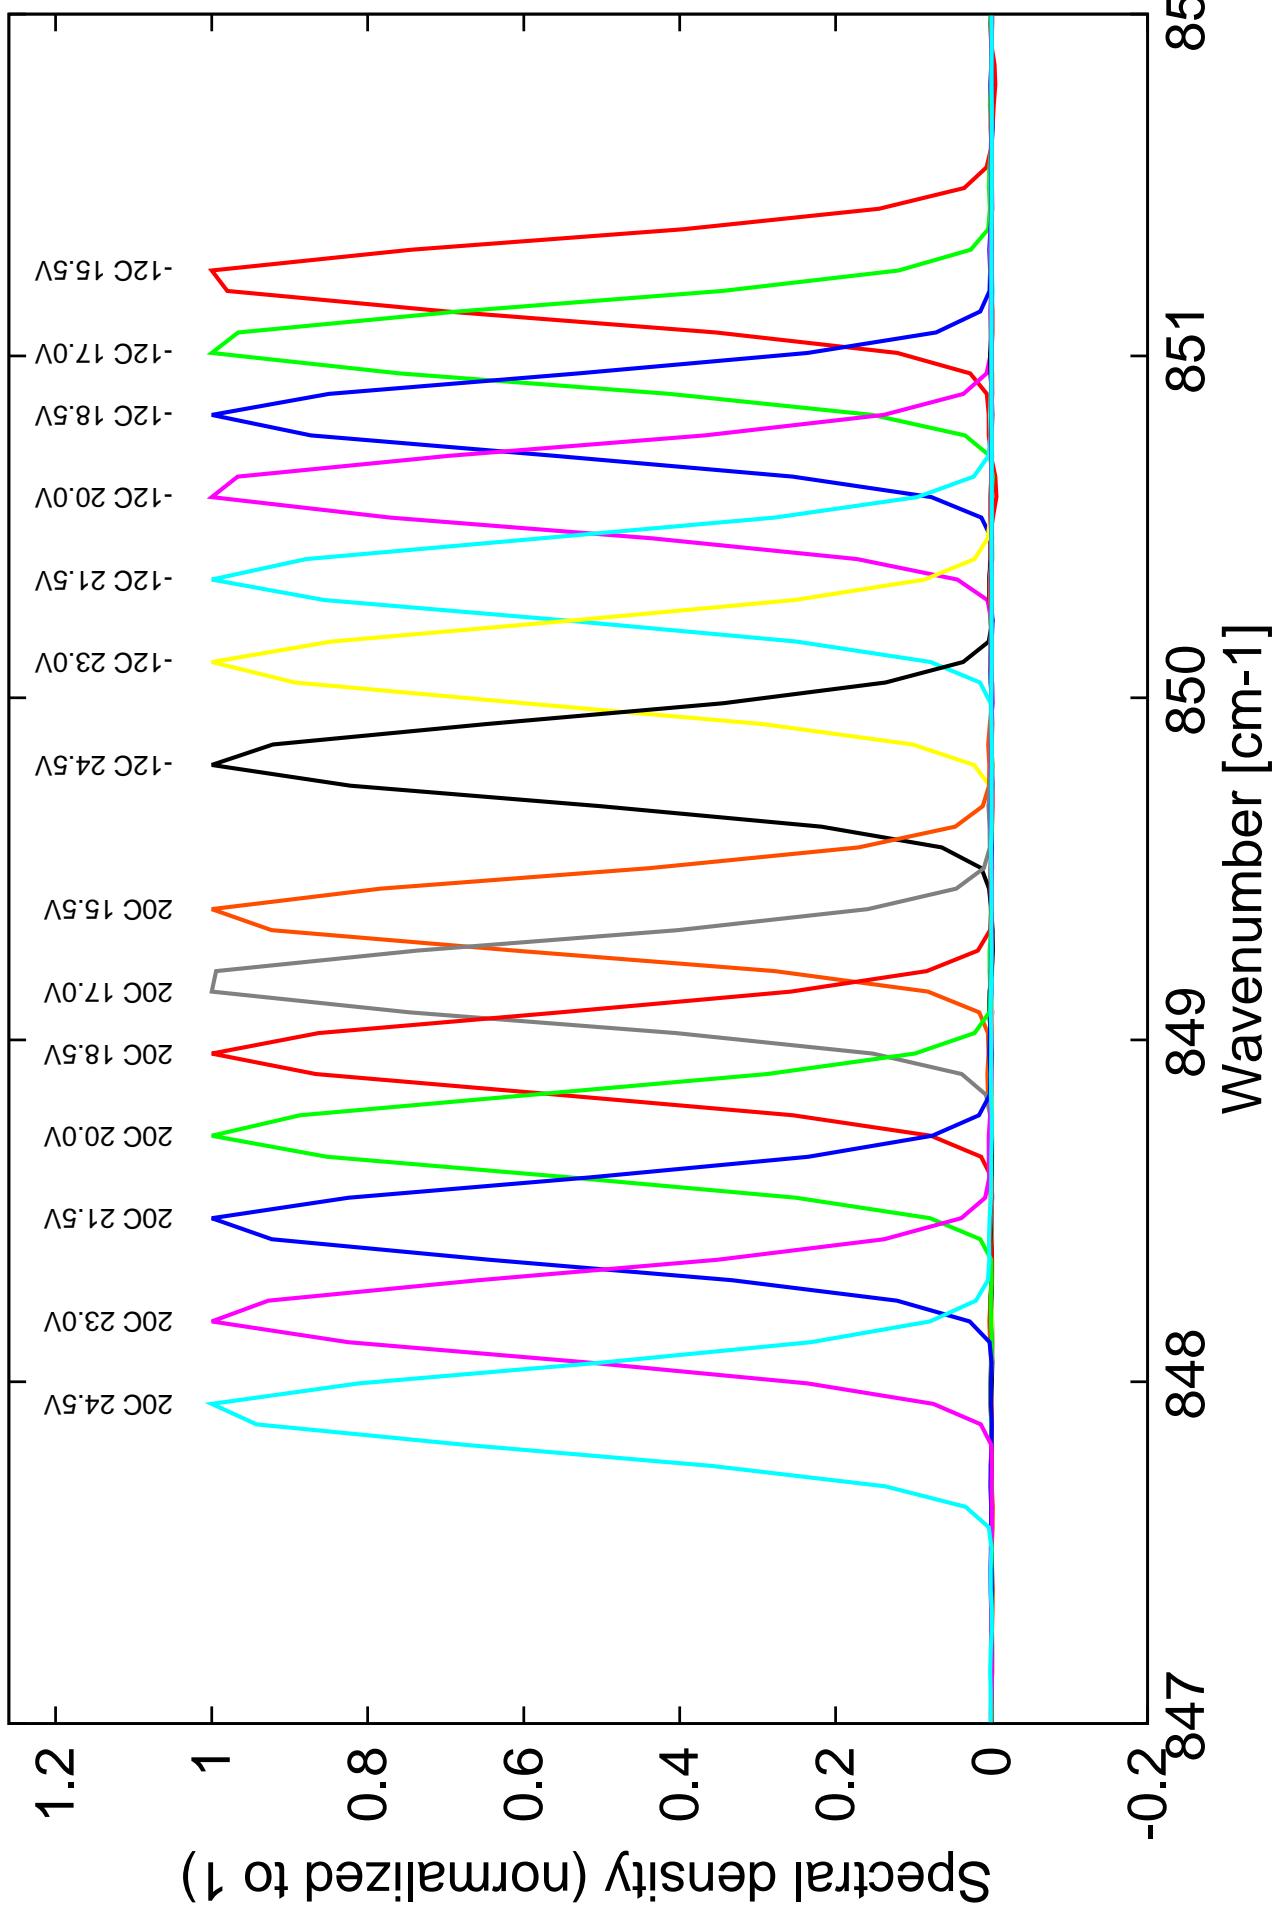


Figure 5: peak current and average power vs LDD voltage at 2% duty-cycle (50ns pulses on the laser, 2.5 $\mu$ s period) (the solid squares indicate the maximum singlemode emitted power)

Figure 4: spectra at different temperatures for various LDD voltages



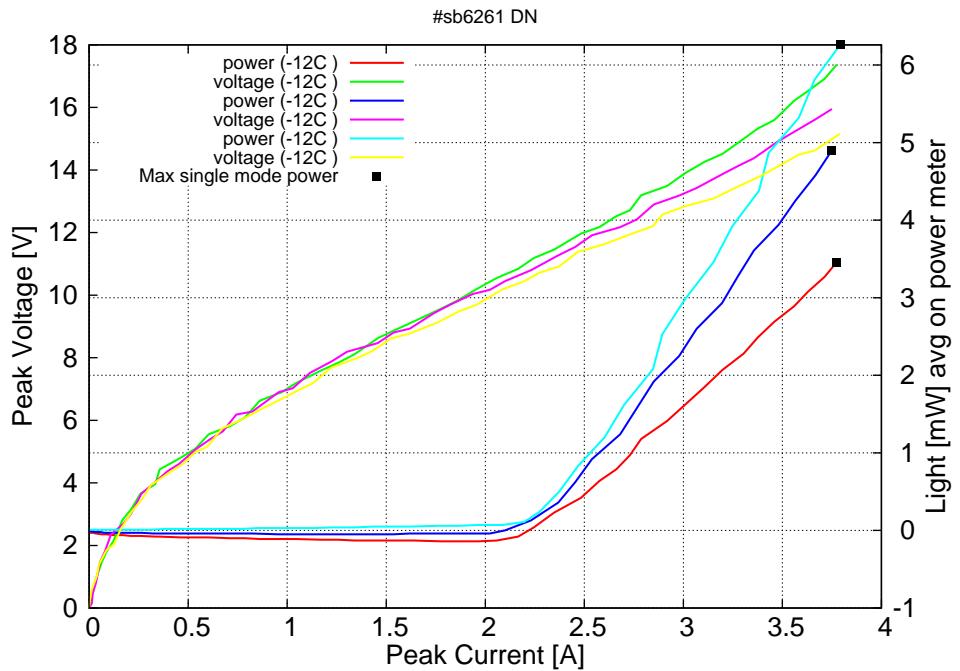


Figure 6: peak voltage and average power vs peak current at 2% (red), 3% (blue) and 4% (cyan) duty-cycle at -12C (50ns pulses on the laser) (the solid squares indicate the maximum singlemode emitted power)

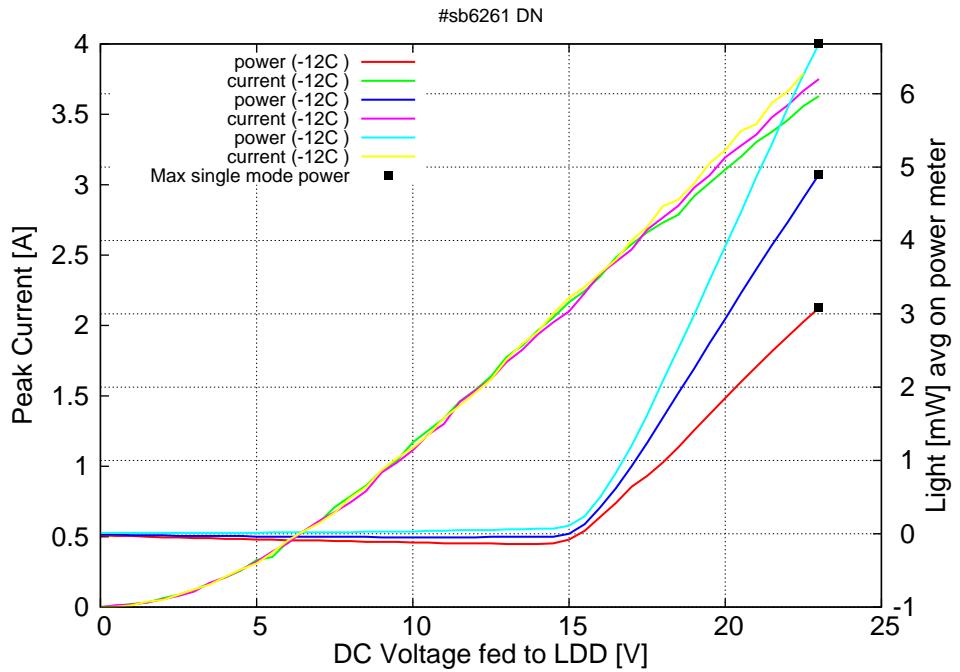


Figure 7: peak current and average power vs LDD voltage at 2% (red), 3% (blue) and 4% (cyan) duty-cycle at -12C (50ns pulses on the laser) (the solid squares indicate the maximum singlemode emitted power)

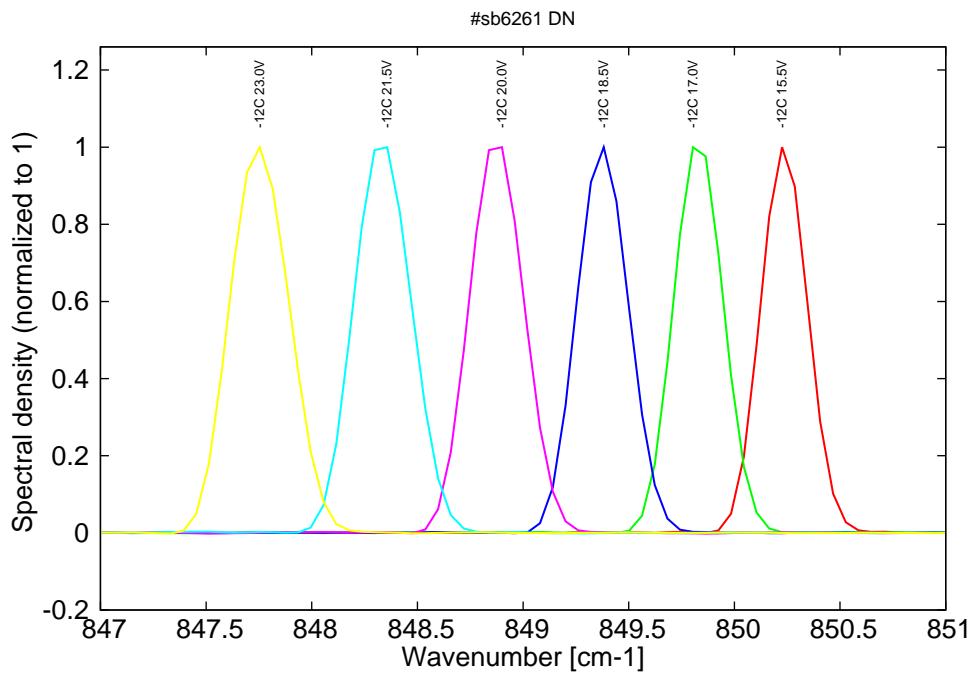


Figure 8: spectra at -12C at 4% duty-cycle