

Datasheet for #sbcw13319 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.



Figure 1: Mechanical and electrical interface for #sbcw13319 DN

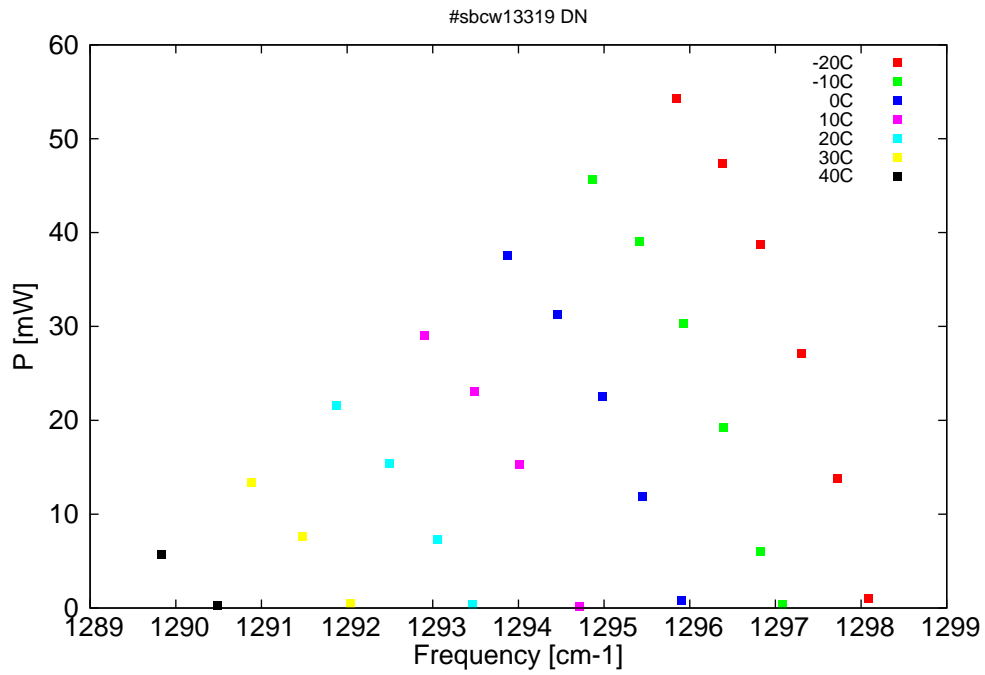


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

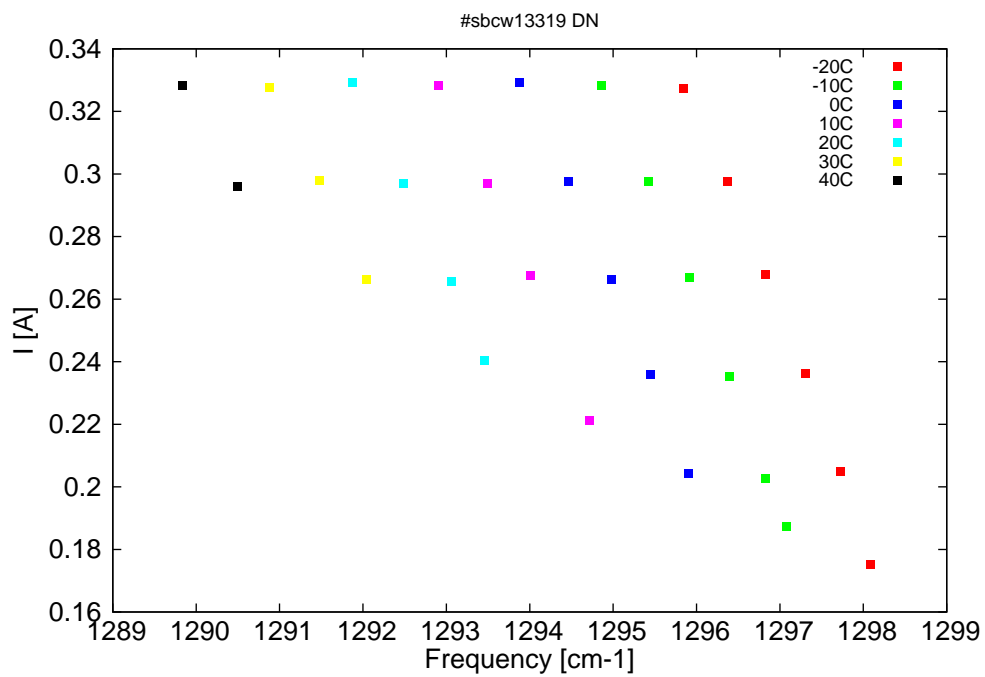


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

λ [nm]	ν [cm ⁻¹]	P[mW]	Temp[°C]	U_{LASER} [V]	I[A]
7703.6	1298.1	1	-20	9.1	0.18
7705.8	1297.7	13.8	-20	9.4	0.2
7708.3	1297.3	27.1	-20	9.6	0.24
7711.1	1296.8	38.8	-20	9.9	0.27
7713.8	1296.4	47.3	-20	10.1	0.3
7717	1295.8	54.3	-20	10.3	0.33
7709.6	1297.1	0.3	-10	9.1	0.19
7711.2	1296.8	6	-10	9.2	0.2
7713.7	1296.4	19.2	-10	9.5	0.24
7716.5	1295.9	30.3	-10	9.7	0.27
7719.5	1295.4	39.1	-10	10	0.3
7722.8	1294.9	45.7	-10	10.2	0.33
7716.7	1295.9	0.8	0	9.1	0.2
7719.3	1295.5	11.9	0	9.3	0.24
7722.1	1295	22.5	0	9.6	0.27
7725.2	1294.5	31.3	0	9.8	0.3
7728.7	1293.9	37.6	0	10.1	0.33
7723.7	1294.7	0.2	10	9.1	0.22
7727.9	1294	15.3	10	9.5	0.27
7731	1293.5	23.1	10	9.7	0.3
7734.5	1292.9	29.1	10	9.9	0.33
7731.2	1293.5	0.4	20	9.1	0.24
7733.6	1293.1	7.3	20	9.3	0.27
7737	1292.5	15.4	20	9.6	0.3
7740.7	1291.9	21.6	20	9.8	0.33
7739.7	1292	0.5	30	9.2	0.27
7743.1	1291.5	7.6	30	9.4	0.3
7746.6	1290.9	13.4	30	9.7	0.33
7749	1290.5	0.3	40	9.3	0.3
7752.9	1289.8	5.7	40	9.6	0.33

Table 1: Singlemode optical output power as function of operating parameters.

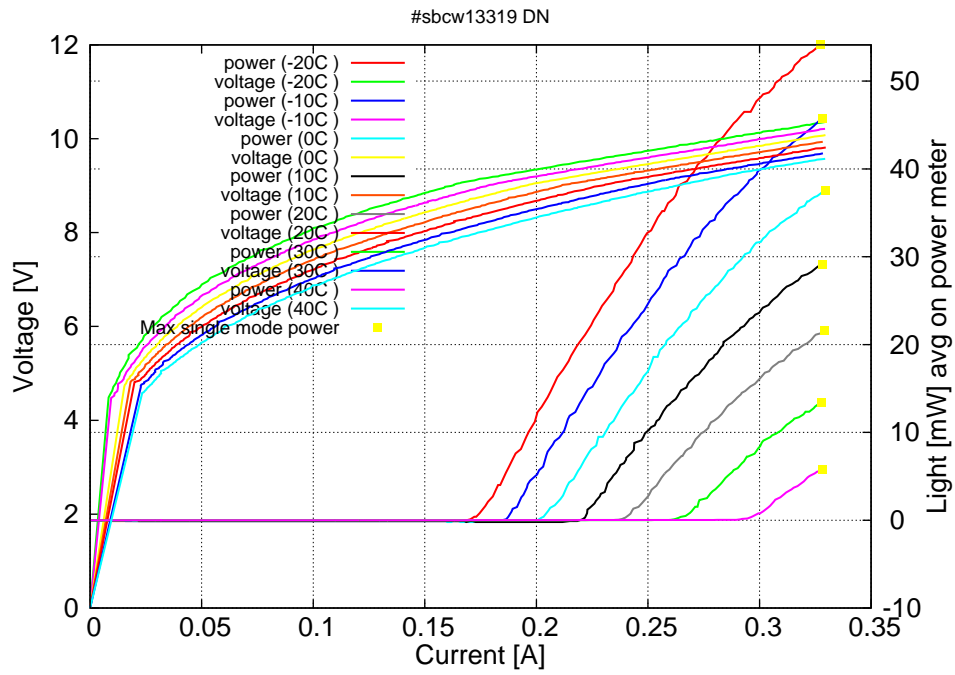


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: at -20C: $I_{th}=0.17A$ / $V_{th}=9V$ (2-wires measurements). Maximum operation current: 0.330A for all temperatures.

Figure 3: spectra at different temperatures for various DC currents

