Passage Max.-Meuron 1-3 Case Postale 1766

CH-2000 Neuchâtel Switzerland Tel: +41 32 729 95 10 Fax: +41 32 721 36 19

Datasheet for #sbcw989 UP

Recommendations:

Please read the starter kit user manual (at least installation chapter 5), if available, and have a look at the FAQ at http://www.alpeslasers.ch/alfaq.pdf

WARNING: Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

WARNING: Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.

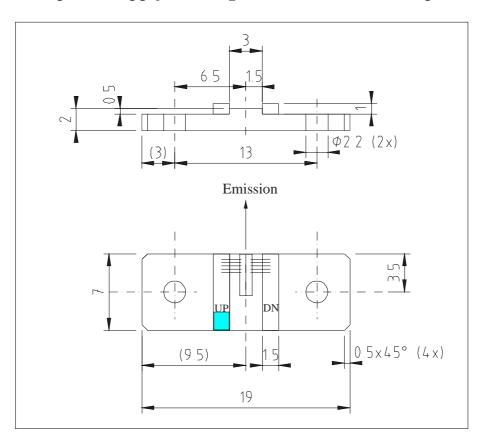


Figure 1: Support mounting for #sbcw989 UP (please note that the laser is connected to the UP pad drawned in blue)

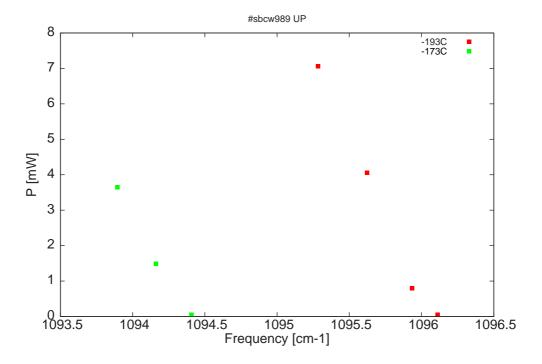


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

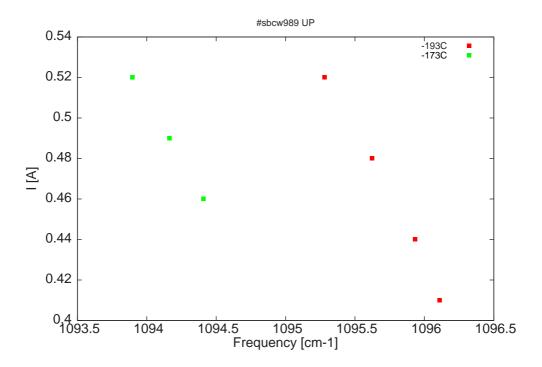


Figure 3: Applied DC current as a function of single mode emission frequencies and temperatures

$\lambda [{ m nm}]$	$\nu [\mathrm{cm}^{-1}]$	P[mW]	$\mathrm{Temp}[^{\circ}\mathrm{C}]$	$U_{LASER}[V]$	I[A]
9123.2	1096.1	0.1	-193	9.9	0.41
9124.6	1095.9	0.8	-193	10	0.44
9127.2	1095.6	4.1	-193	10.1	0.48
9130.1	1095.3	7.1	-193	10.2	0.52
9137.4	1094.4	0.1	-173	9.7	0.46
9139.4	1094.2	1.5	-173	9.8	0.49
9141.6	1093.9	3.6	-173	9.9	0.52

Table 1: singlemode optical output power as function of operating parameters

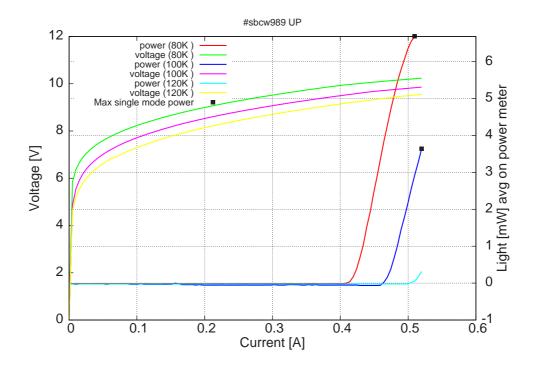


Figure 4: peak voltage and average power vs peak current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

Note: The collection efficiency of our setup for nitrogen temperatures measurements is 67% using a 2-inches parabolic mirror with a focal length of 2-inches.

Note: at 80K: Ith=410mA / Vth= 9.96V (2-wires measurements) Maximum operation current: 0.52A for all temperatures.

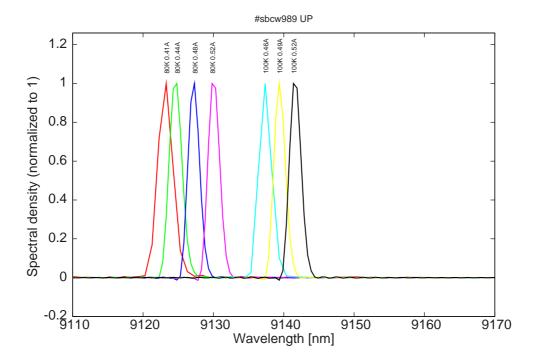


Figure 5: spectra at 80K, 100K, 120K and 140K

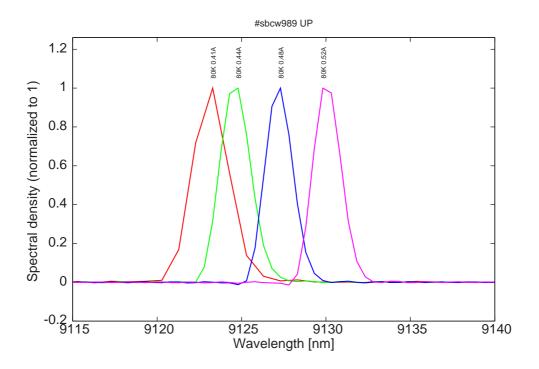


Figure 6: spectra at $80\mathrm{K}$

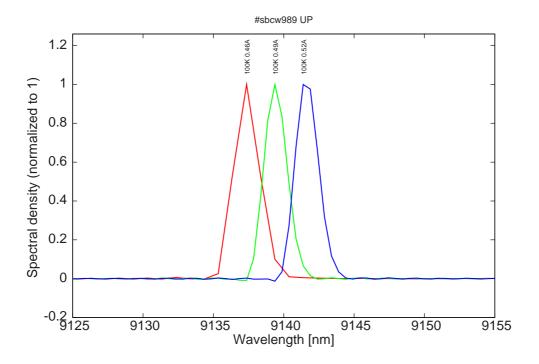


Figure 7: spectra at $100\mathrm{K}$