

Datasheet for #sbcw6357 DN

Recommendations:

Please read the User Manual and have a look at the FAQ at <http://www.alpeslasers.ch/?a=142>

**WARNING:** Operating the laser with higher current or voltage than specified in this document may cause damage and will result in loss of warranty, unless Alpes Lasers has permitted to do so!

**WARNING:** Beware of the polarity of the laser. This laser has to be powered with negative current on the laser contact (= bonding pad, corresponding to the label "laser" on the LLH) and the positive current on the base contact (= submount, corresponding to the label "base" on the LLH). To use with a power-supply ILX Lightwave LDX-3232 or equivalent.

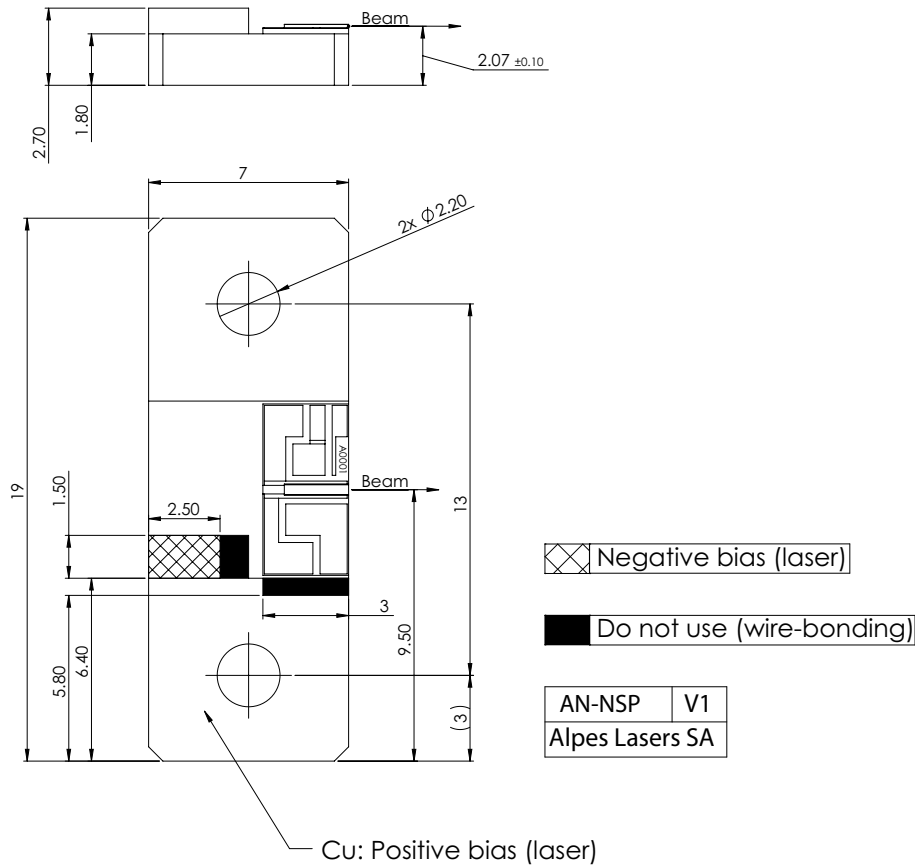


Figure 1: Support mounting for #sbcw6357 DN

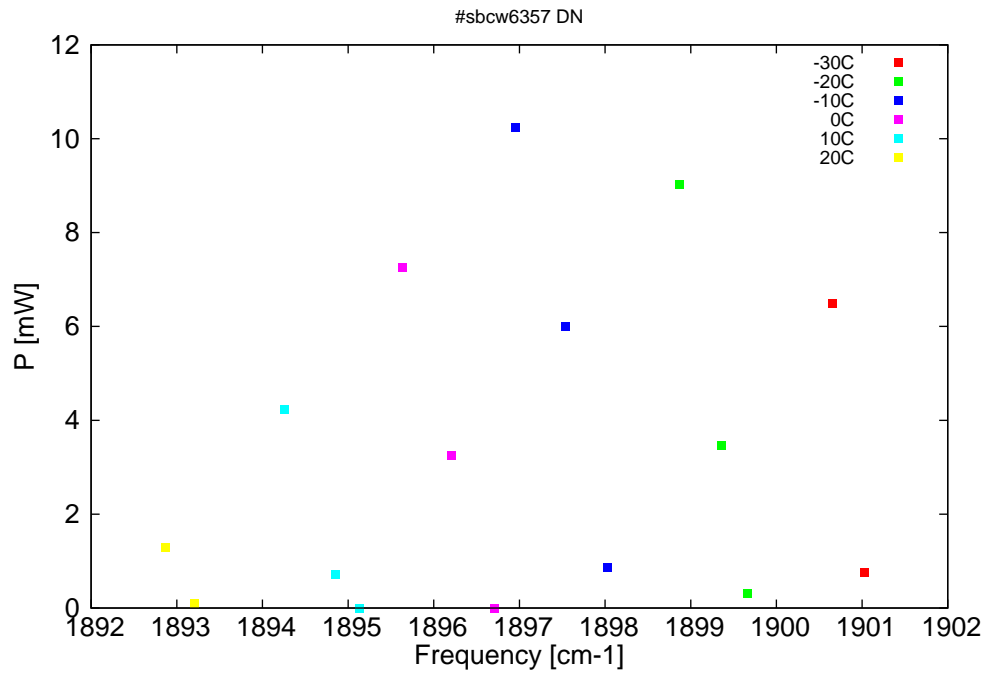


Figure 2: Output power as a function of the singlemode emission frequencies and temperatures

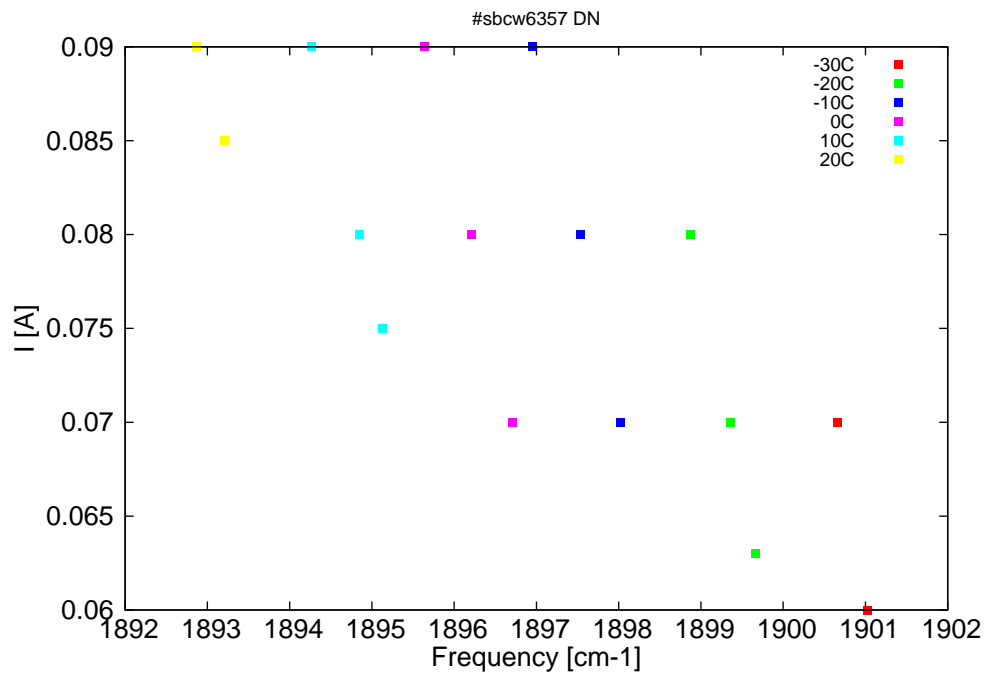


Figure 3: Applied DC current as a function of singlemode emission frequencies and temperatures

$\lambda$ [nm]	$\nu$ [cm <sup>-1</sup> ]	P[mW]	Temp[°C]	$U_{LASER}$ [V]	I[A]
5260.3	1901	0.8	-30	8.1	0.06
5261.3	1900.7	6.5	-30	8.4	0.07
5264.1	1899.7	0.3	-20	8.2	0.06
5264.9	1899.4	3.5	-20	8.4	0.07
5266.3	1898.9	9	-20	8.7	0.08
5268.6	1898	0.9	-10	8.4	0.07
5270	1897.5	6	-10	8.7	0.08
5271.6	1897	10.2	-10	9.1	0.09
5272.3	1896.7	0	0	8.4	0.07
5273.7	1896.2	3.2	0	8.7	0.08
5275.3	1895.6	7.2	0	9	0.09
5276.7	1895.1	0	10	8.5	0.08
5277.5	1894.8	0.7	10	8.7	0.08
5279.1	1894.3	4.2	10	9	0.09
5282	1893.2	0.1	20	8.8	0.09
5283	1892.9	1.3	20	9	0.09

Table 1 : singlemode optical output power as function of operating parameters

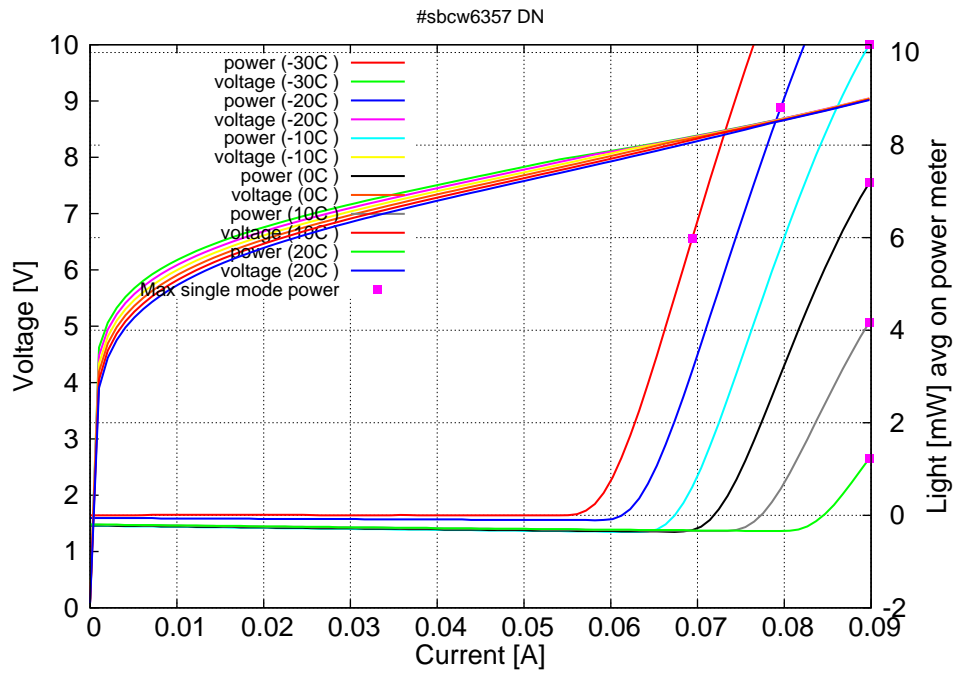


Figure 4: voltage and avg power vs current in continuous-wave operation (the solid squares indicate the maximum singlemode emitted power)

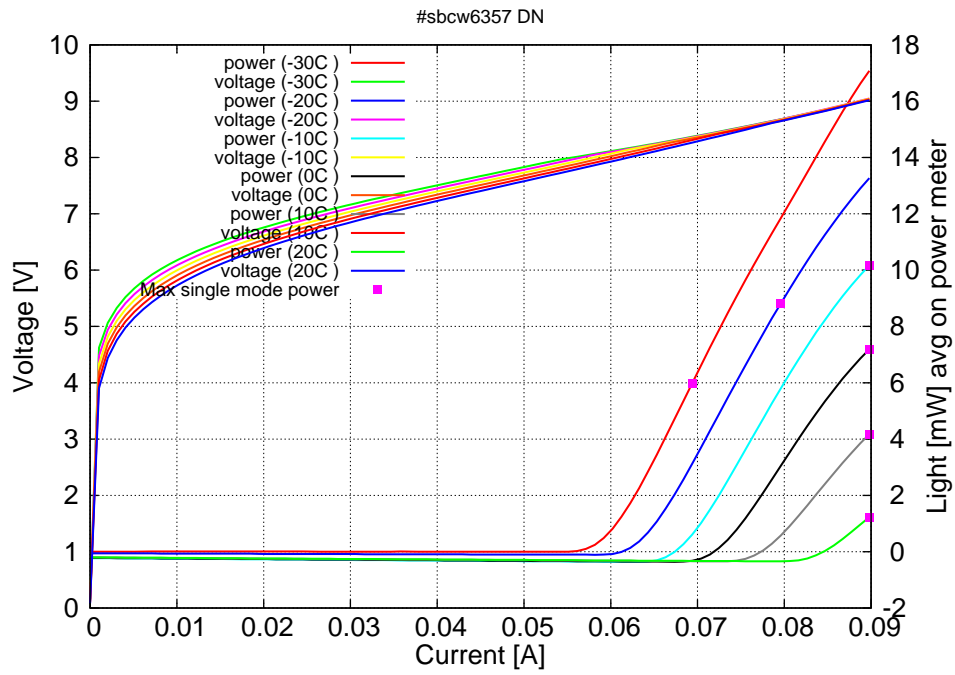


Figure 5: voltage and avg power vs current in continuous-wave operation (including the multimode region)

Note: at -30C:  $I_{th}=0.055A$  /  $V_{th}=8.0V$  (2-wires measurements). Maximum operation current: 0.09A for all temperatures.



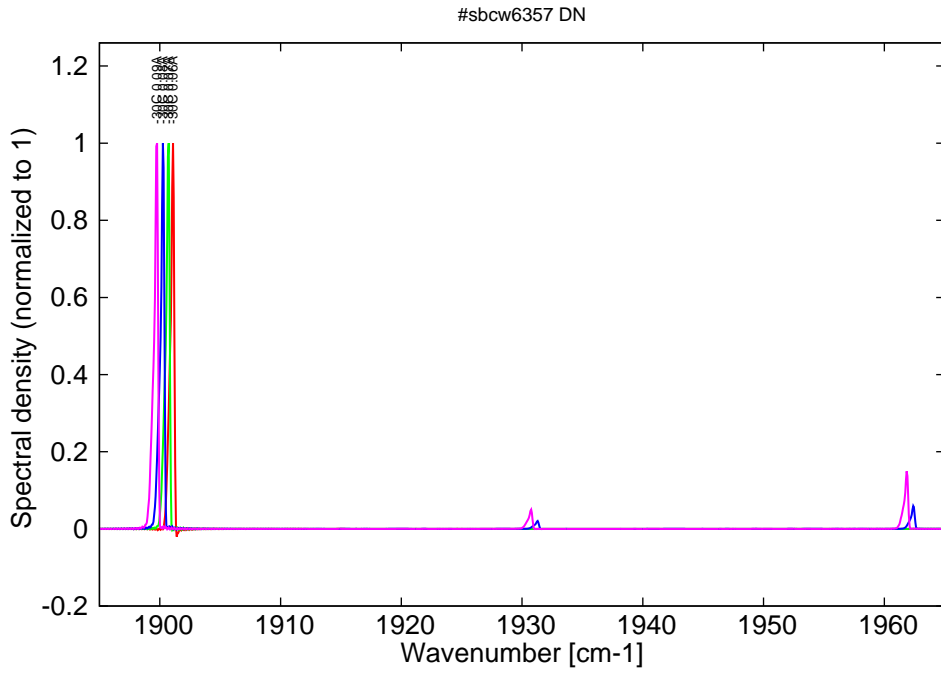


Figure 6: spectra at -30C for various DC currents (monomode up to 0.07A, then becomes multimode)

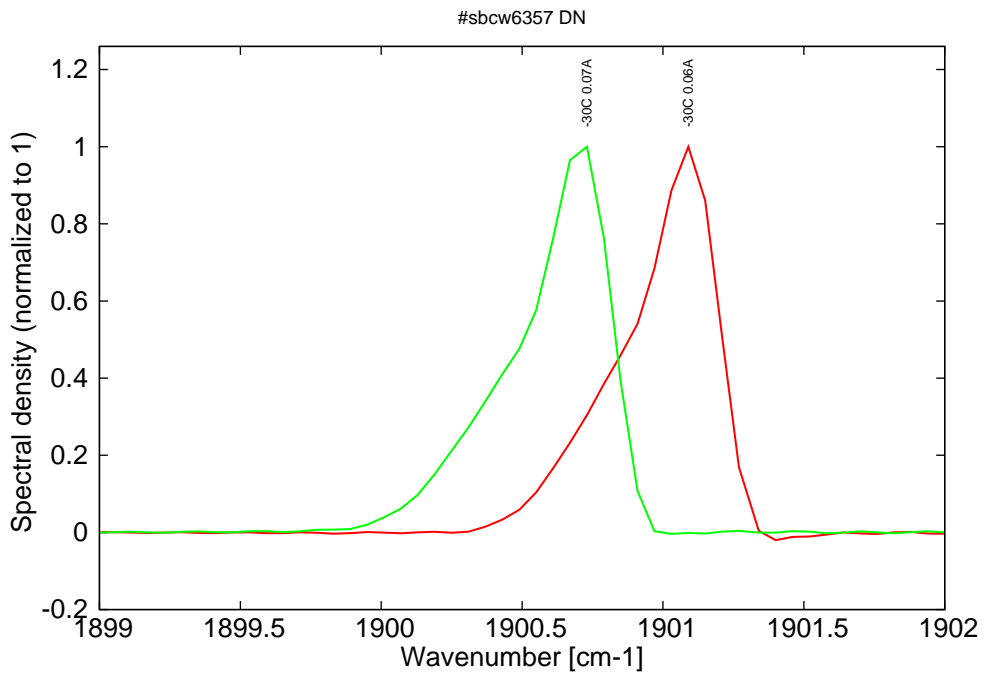


Figure 7: spectra at -30C for various DC currents (monomode range)

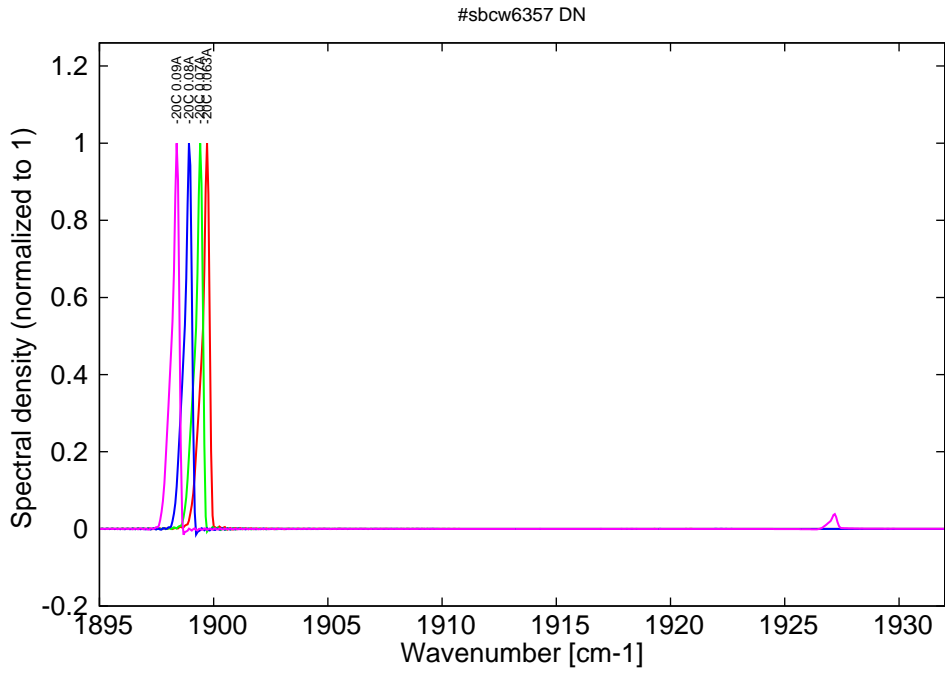


Figure 8: spectra at -20C for various DC currents (monomode up to 0.08A, then becomes multimode)

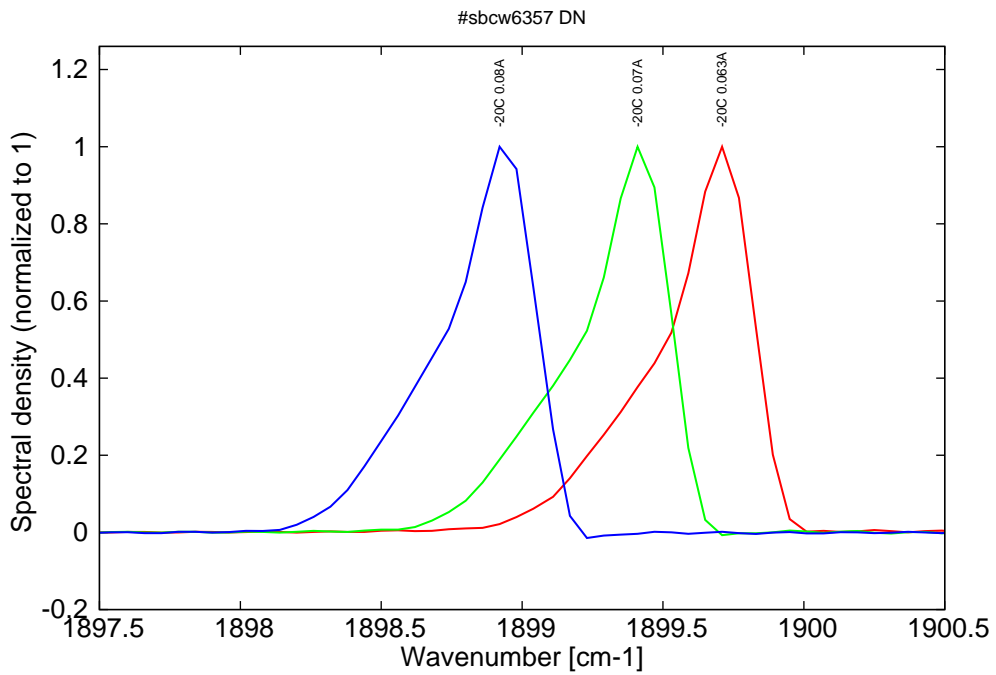


Figure 9: spectra at -20C for various DC currents (monomode range)

Figure 9: spectra between -10C and 20C for various DC currents (all monomode)

